
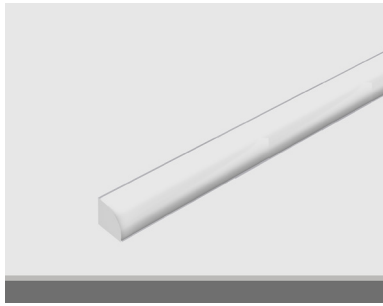


DESCRIPTION:


Architectural, rigid, linear luminaire system in discrete and continuous lengths for glare free, effective & efficient illumination.
 Low profile extruded aluminium housing & heat sink with integrated diffuser. 96lm/W LED engine.
 Modular, tool less, interchangeable component design:
 - Outer Housing (white, black & anodised aluminium options)
 IP33 standard with IP65 & IP67 options, MacAdam Ellipse 2 LED, CRI > 80 & > 90, 30,000 (LM80) operating hours, 3 year standard warranty, Pluggable pre-terminated Tridonic / Philips driver as standard.


SPECIFICATIONS:

Standard Length: 2500mm



| | | | |
|-------------------------|----------|---------------------|--------------------|
| Mains Voltage (V) | 220-240 | Operational Hours | 30,000 (LM80) |
| Mains Frequency (Hz) | 50-60 | Operating Temp (°C) | -20 to +45 |
| Ingress Protection (IP) | 33 | Body* | Extruded Aluminium |
| Optional (IP) | 65/67 | Finish* | Anodised Aluminium |
| MacAdam Ellipse | 2 SDCM | Optic Lens* | Opal Diffuser |
| CRI | >80 | Warranty | 3 Years |
| Efficiency (lm/W) | Up to 96 | | |

* Housing / Trim / Diffuser

PERFORMANCE:


| PARAMETER | STANDARD | OPTIONS |
|--------------------|--------------------------|---|
| A Model: | LEDPro Small Edge (LPSE) | |
| B CRI: | 8 : >80 | 9 : >90 |
| C CT: | 30 : 3000K | 27 : 2700K, 40: 4000K, T: Tunable, RGB: RGB |
| D Load: | 10 : 9.6W/m | 5 : 4.7W/m, 15: 13.8W/m, 20: 18.5W/m |
| E Beam: | W : Wide (120) | |
| F Ingress: | 33 : IP33 | 65 : IP65, 67: IP67 |
| G External Finish: | A : Anodised | : White, B: Black |
| H Baffle Finish: | N/A | |
| I Control: | S : Switched | D : 1-10V, DA: DALI, P: Phase |
| J Accessories: | | |

ORDERING:

Please contact us for other specific product options, variants and finishes:
Hello@Chiaralighting.com

CODE BUILDER

| A | B | C | D | E | F | G | H | I | J |
|------|---|----|----|---|----|---|---|---|---|
| LPSE | 8 | 30 | 10 | W | 33 | A | - | S | - |

STANDARD ORDER CODES:

LPSE.8.30.20.W.33.A.S
 LPSE.8.30.15.W.33.A.S
 LPSE.8.30.10.W.33.A.S
 LPSE.8.30.5.W.33.A.S

**SUPPLY VOLTAGE:
(V)**

24
 24
 24
 24

**LUMEN OUTPUT:
(lm/m)**

1,146
 880
 592
 294

**TYPICAL PRODUCT DESCRIPTION:
(Example)**

LEDPro Small Edge, 18.5W/m, 3000K
 LEDPro Small Edge, 13.8W/m, 3000K
 LEDPro Small Edge, 9.4W/m, 3000K
 LEDPro Small Edge, 4.7W/m, 3000K