


Line70

70mm Linear Profile



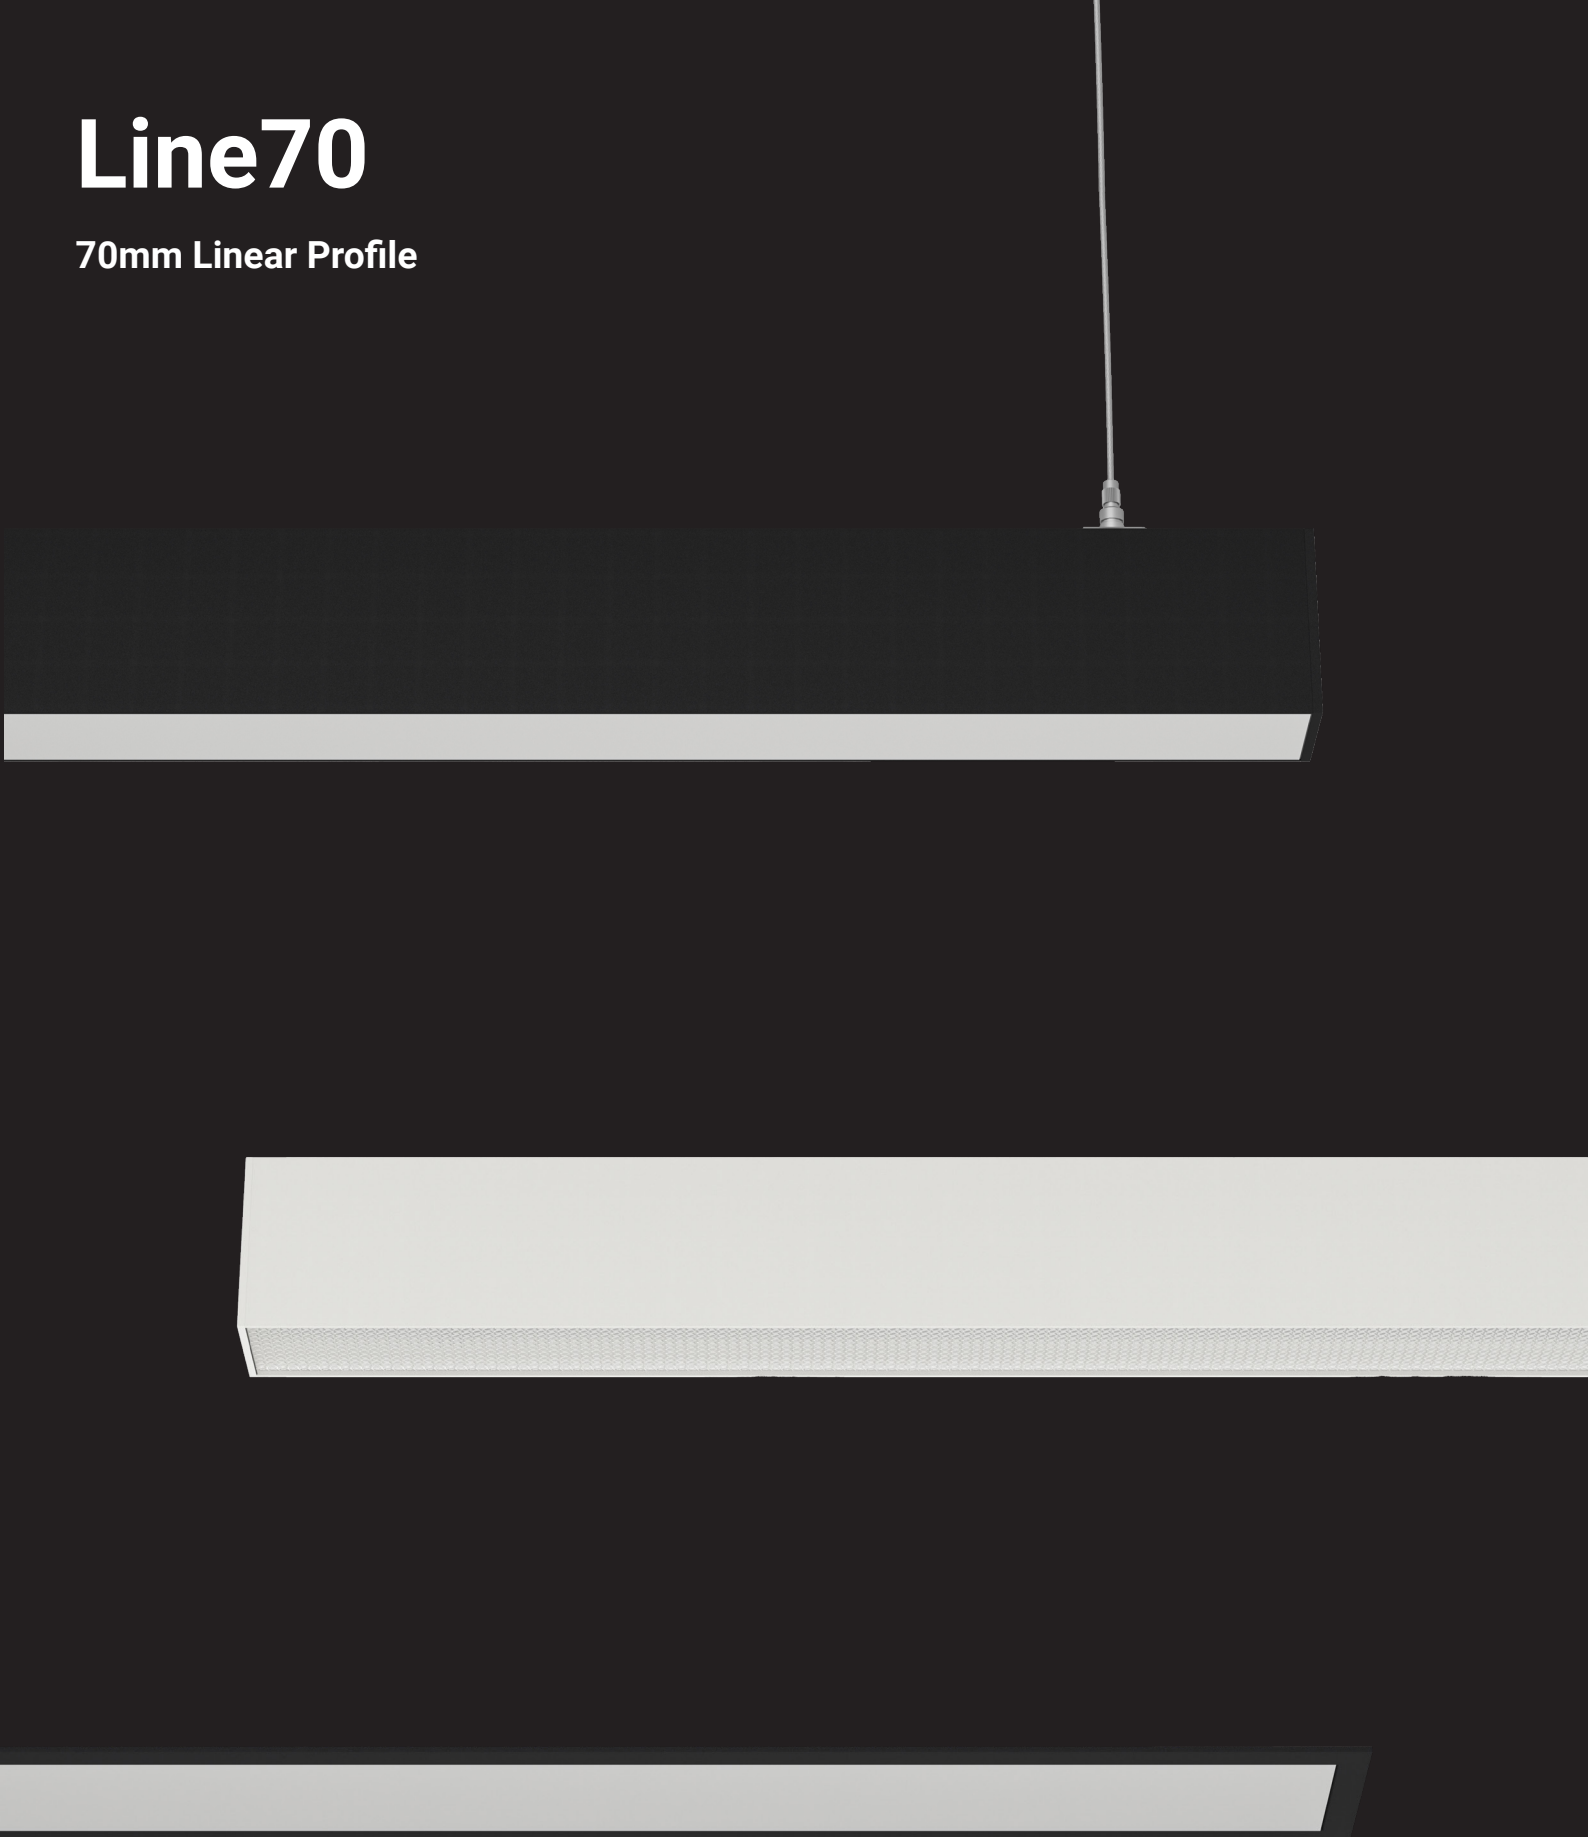

Project Name _____

Luminaire Ref _____

Date _____

Line70 Linear Profile - Recessed

The Line70 profile Luminaire sets new standards in efficiency and quality with its impressive width of 70mm. Every detail has been carefully designed from moulded endcaps to UGR compliant diffusers ensuring both efficient and aesthetics meet every demand.

The Line70 relies on cutting edge LED technology to produce outstanding light quality and offer a range of intelligent integrated lighting controls and sensors to fulfill any project.

Product Details


Mains Voltage (V)	230-240v	Binning (SDCM)	3	Ingress Protection	20	Body	Aluminium
Mains Frequency (Hz)	50-60 Hz	Operating Temp (C°)	-20° to 40°	LED Lifetime	50,000hrs L80 B10	Warranty	5 Years

Technical Specification

CCT	Length (mm)	System Output	System Power	Efficacy (LLM/W)
4000	1232	3418	30.0	113.93
4000	1472	4102	35.8	114.58
4000	1712	4785	41.1	116.42
4000	1952	5469	46.3	118.12
4000	2192	6152	52.0	118.31
4000	2432	6836	57.3	119.30
4000	2912	8203	69.6	117.86
4000	3152	8887	75.5	117.71

Please Note: The above data is based on using Ra80, 4000k boards running at maximum output with Opal Diffuser, please contact sales for the data on other variants

Dimensional Drawing

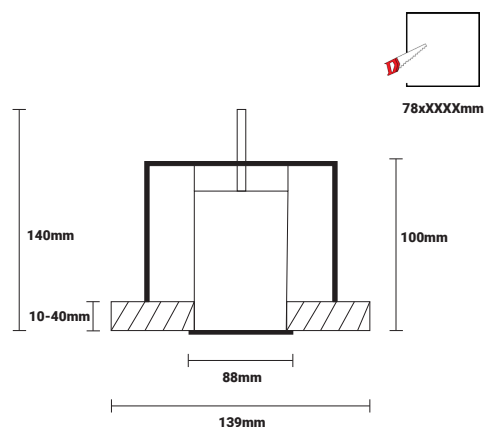

Code Builder

Model	Length	Mounting	Body	Optic	Ra	CCT	Control	Sensor	Emergency
L70	1232 (12)	Recessed (R)	White (W)	Opal (OP)	80 (8)	2700 (27)	Switched (S)	Contact Sales	Std Emergency (EM)
	1472 (14)		Black (B)	Microprism (MP)	90 (9)	3000 (30)	DALI (D)		Self Test (EMST)
	1712 (17)		Silver (S)			4000 (40)	Casambi (C)		DALI (EMD)
	1952 (19)					2700-6500 (TW)			
	2192 (21)								
	2432 (24)								
	2912 (29)								
	3152 (31)								
	Custom Shape (Contact Sales)								

Please note: Specification Values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/ down for illustrative purposes. We reserve the right to amend or change details without prior notification



Project Name _____

Luminaire Ref _____

Date _____

Line70 Linear Profile Direct only - Surface / Suspended

The Line70 profile Luminaire sets new standards in efficiency and quality with its impressive width of 70mm. Every detail has been carefully designed from moulded endcaps to UGR compliant diffusers ensuring both efficient and aesthetics meet every demand.

The Line70 relies on cutting edge LED technology to produce outstanding light quality and offer a range of intelligent integrated lighting controls and sensors to fulfill any project.

Product Details


Mains Voltage (V)	230-240v	Binning (SDCM)	3	Ingress Protection	20	Body	Aluminium
Mains Frequency (Hz)	50-60 Hz	Operating Temp (C°)	-20° to 40°	LED Lifetime	50,000hrs L80 B10	Warranty	5 Years

Technical Specification

CCT	Length (mm)	System Output	System Power	Efficacy (LLM/W)
4000	1214	3418	30.0	113.93
4000	1454	4102	35.8	114.58
4000	1694	4785	41.1	116.42
4000	1934	5469	46.3	118.12
4000	2174	6152	52.0	118.31
4000	2414	6836	57.3	119.30
4000	2894	8203	69.6	117.86
4000	3134	8887	75.5	117.71

Please Note: The above data is based on using Ra80, 4000k boards running at maximum output with Opal Diffuser, please contact sales for the data on other variants

Dimensional Drawing

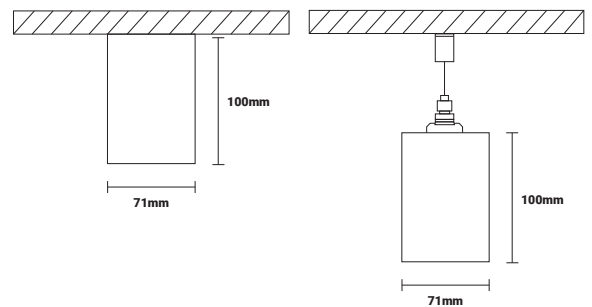

Code Builder

Model	Length	Mounting	Body	Optic	Ra	CCT	Control	Sensor	Emergency
L70D	1214 (12)	Surface (S)	White (W)	Opal (OP)	80 (8)	2700 (27)	Switched (S)	Contact Sales	Std Emergency (EM)
	1454 (14)	Suspended (SUS)	Black (B)	Microprism (MP)	90 (9)	3000 (30)	DALI (D)		Self Test (EMST)
	1694 (16)		Silver (S)			4000 (40)	Casambi (C)		DALI (EMD)
	1934 (19)					2700-6500 (TW)			
	2174 (21)								
	2414 (24)								
	2894 (28)								
	3134 (31)								
	Custom Shape (Contact Sales)								

Please note: Specification Values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/ down for illustrative purposes. We reserve the right to amend or change details without prior notification



Project Name _____

Luminaire Ref _____

Date _____

Line70 Linear Profile Direct/ Indirect - Suspended

The Line70 profile Luminaire sets new standards in efficiency and quality with its impressive width of 70mm. Every detail has been carefully designed from moulded endcaps to UGR compliant diffusers ensuring both efficient and aesthetics meet every demand.

The Line70 relies on cutting edge LED technology to produce outstanding light quality and offer a range of intelligent integrated lighting controls and sensors to fulfill any project.

Product Details


Mains Voltage (V)	230-240v	Binning (SDCM)	3	Ingress Protection	20	Body	Aluminium
Mains Frequency (Hz)	50-60 Hz	Operating Temp (C°)	-20° to 40°	LED Lifetime	50,000hrs L80 B10	Warranty	5 Years

Technical Specification

CCT	Length (mm)	System Output	System Power	Efficacy (LLM/W)
4000	1214	8176	57.2	142.94
4000	1454	9811	68.1	144.07
4000	1694	11446	80.8	141.66
4000	1934	13082	91.7	142.66
4000	2174	14717	103.0	142.88
4000	2414	16352	113.1	144.58
4000	2894	19622	134.8	145.56
4000	3134	21258	145.3	146.30

Please Note: The above data is based on using Ra80, 4000k boards running at maximum output with Opal Diffuser, please contact sales for the data on other variants

Dimensional Drawing

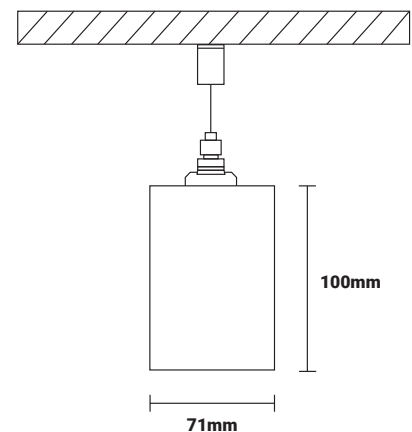

Code Builder

Model	Length	Mounting	Body	Optic	Ra	CCT	Control	Sensor	Emergency
L70DI	1214 (12)	Suspended (SUS)	White (W)	Opal (OP)	80 (8)	2700 (27)	Switched (S)	Contact Sales	Std Emergency (EM)
	1454 (14)		Black (B)	Microprism (MP)	90 (9)	3000 (30)	DALI (D)		Self Test (EMST)
	1694 (16)		Silver (S)			4000 (40)	Casambi (C)		DALI (EMD)
	1934 (19)					2700-6500 (TW)			
	2174 (21)								
	2414 (24)								
	2894 (28)								
	3134 (31)								
	Custom Shape (Contact Sales)								

Please note: Specification Values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/ down for illustrative purposes. We reserve the right to amend or change details without prior notification