

ARCH PRO

Round Fixed IP65



Chiara Lighting Ltd,
Unit 14E Club Lane,
Calderdale Business Park,
Calderdale
HX2 8DB

Tel: +44 (0)330 0571 888

Email: Hello@chiaralighting.com

Web: www.chiaralighting.com





Project Name _____

Luminaire Ref _____

Date _____


Arch Pro Round Fixed IP65 - Recessed

Part of the Arch PRO family, the Round Fixed IP65 offers protection from dust and jets of water and is perfect for use in showers or bathrooms in hospitality, residential and leisure applications. With interchangeable components, you can select from a range of colours, light sources, and accessories to create a bespoke solution. For easy tool-free maintenance, the light source is accessible from below.

Product Details

Mains Voltage (V)	230-240v
Mains Frequency (Hz)	50-60 Hz
CRI (Ra)	92
Binning (SDCM)	3
Operating Temp (C°)	-20° to +40°
Ingress Protection	IP65
LED Lifetime	50,000hrs L80 B10
Optical Control	Optical Lens (PC)
Body	Die Cast Aluminium/ Injection moulded PC
Warranty	5 Years

Dimensions

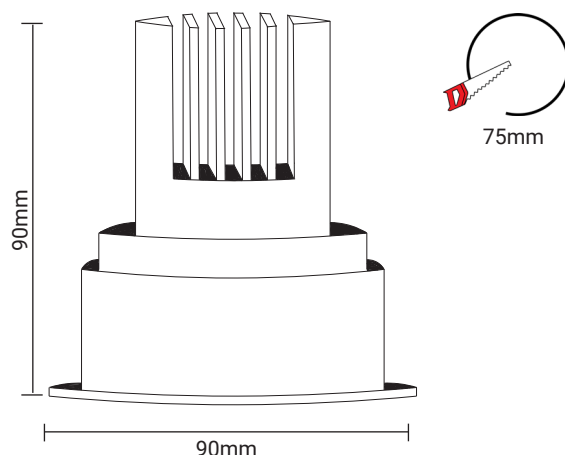

Technical Specification

CCT	CRI	System Output	System Power	Beam Angle	CCT	CRI	System Output	System Power	Beam Angle	CCT	CRI	System Output	System Power	Beam Angle
2700	90	395	8	18°	2700	90	596	11	18°	2700	90	797	14	18°
2700	90	389	8	36°	2700	90	586	11	36°	2700	90	784	14	36°
2700	90	376	8	50°	2700	90	567	11	50°	2700	90	757	14	50°
3000	90	414	8	18°	3000	90	626	11	18°	3000	90	833	14	18°
3000	90	407	8	36°	3000	90	616	11	36°	3000	90	819	14	36°
3000	90	393	8	50°	3000	90	596	11	50°	3000	90	792	14	50°
4000	90	438	8	18°	4000	90	657	11	18°	4000	90	876	14	18°
4000	90	431	8	36°	4000	90	646	11	36°	4000	90	861	14	36°
4000	90	416	8	50°	4000	90	624	11	50°	4000	90	833	14	50°

Please note: The above data is based on a black baffle, please contact sales for the data on other colour variants

Code Builder

Model	Bezel	Baffle	Accessories	Engine	CCT	Power	Beam Angle	Control	Emergency
APRF65	White (W)	White (W)	Honeycomb (HC)	LE5	2700 (27)	8W (8)	18° (18)	Switched (S)	Std Emergency (EM)
	Black (B)	Black (B)	Frosted Glass (FG)		3000 (30)	11W (11)	36° (36)	Phase Dim (PD)	Self Test (EMST)
		Matt (M)	Clear Glass (CG)		4000 (40)	14W (14)	50° (50)	DALI (D)	DALI (EMD)
		Gold (G)	Fire Rated (FR90)					Casambi (C)	

Please note: Specification Values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/ down for illustrative purposes. We reserve the right to amend or change details without prior notification