

Minux 44

Mini Architectural Downlight





Project Name _____

Luminaire Ref _____

Date _____


Minux 44 - Fixed Recessed

The Minux is a minimalist fixture which combines a slim design with a high lumen output. Available with ceiling cut-outs in Ø38mm, Ø44mm, and Ø57mm for trim versions, the Minux also offers trimless option. The Minux also features options of five reflector colors including chrome black, matt, white, black, and gold. Beam angles are available in small, medium, and wide, with a UGR <19 for comfortable, high-quality lighting.

Product Details

Mains Voltage (V)	230-240v
Mains Frequency (Hz)	50-60 Hz
CRI (Ra)	92
Binning (SDCM)	3
Operating Temp (C°)	-20° to +40°
Ingress Protection	IP65
LED Lifetime	50,000hrs L80 B10
Optical Control	Optical Lens (PC)
Body	Die Cast Aluminium
Warranty	5 Years

Dimensions

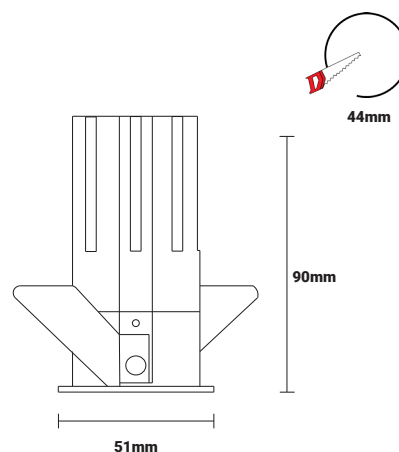

Technical Specification

CCT	CRI	System Output	System Power	Beam Angle
2700	90	800	11	20°
2700	90	800	11	40°
2700	90	800	11	50°
3000	90	850	11	20°
3000	90	850	11	40°
3000	90	850	11	50°
4000	90	900	11	20°
4000	90	900	11	40°
4000	90	900	11	50°

Please note: The above data is based on dark light reflector, please contact sales for the data on other colour variants

Code Builder

Model	Bezel	Reflector	CRI	CCT	Power	Beam Angle	Control	Emergency
MINU44	White (W)	Dark Light (DL)	90 (9)	2700 (27)	11W (11)	20° (20)	Switched (S)	Std Emergency (EM)
	Black (B)	Black (B)		3000 (30)		40° (40)	Phase Dim (PD)	Self Test (EMST)
		Matt (M)		4000 (40)		50° (50)	DALI (D)	DALI (EMD)
		White (W)					Casambi (C)	
		Gold (G)						

Please note: Specification Values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/ down for illustrative purposes. We reserve the right to amend or change details without prior notification