


ARCH PRO

Round Adjustable Snoot Trimless



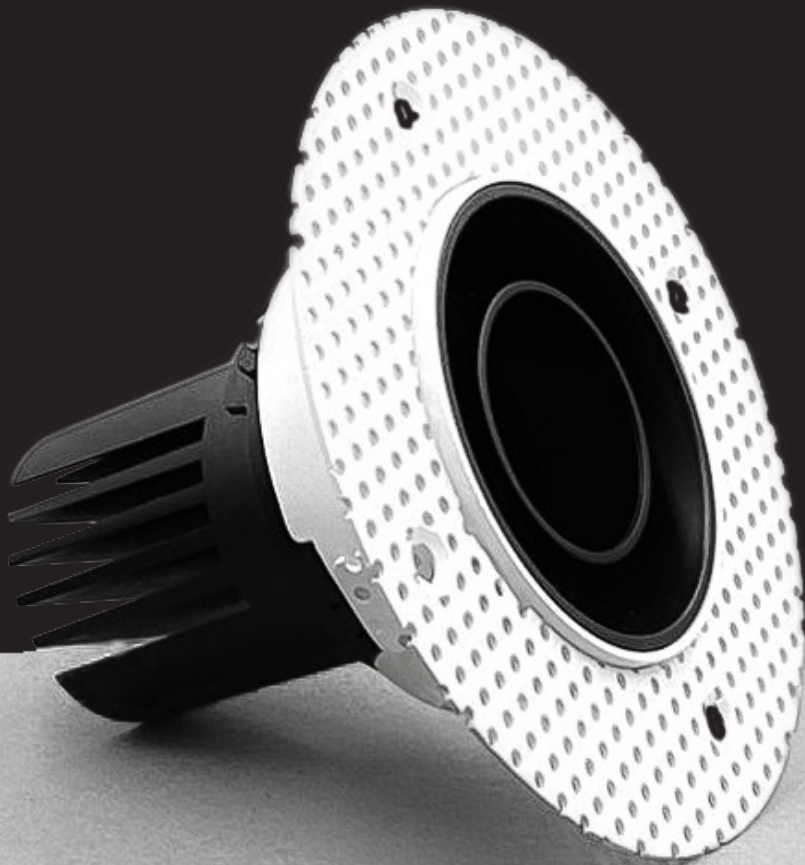

Project Name _____

Luminaire Ref _____

Date _____


Arch Pro Round Adjustable Snoot - Trimless

The Arch PRO Round Adjustable Snoot Trimless allows you to control the direction of light and create a soft focused beam with optimum glare control at UGR<19. Perfect for display and accent lighting in hospitality, residential and leisure applications, this downlight can be built bespoke to project requirements with interchangeable, customisable components. For easy tool-free maintenance, the light source is accessible from below.

Product Details

Mains Voltage (V)	230-240v
Mains Frequency (Hz)	50-60 Hz
CRI (Ra)	92
Binning (SDCM)	3
Operating Temp (C°)	-20° to +40°
Ingress Protection	IP20
LED Lifetime	50,000hrs L80 B10
Optical Control	Optical Lens (PC)
Body	Die Cast Aluminium/ Injection moulded PC
Warranty	5 Years

Dimensions

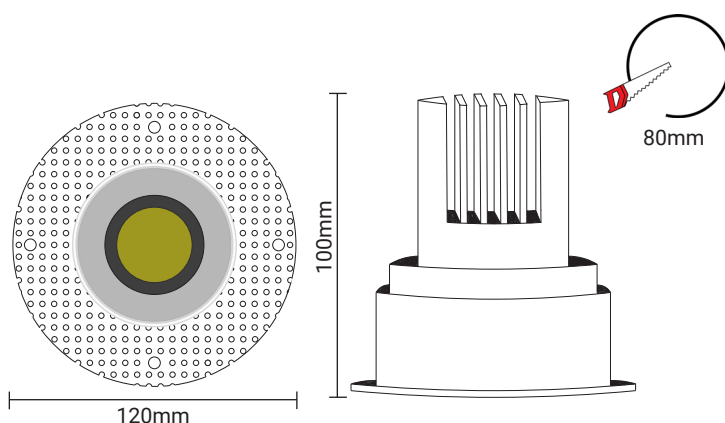

Technical Specification

CCT	CRI	System Output	System Power	Beam Angle	CCT	CRI	System Output	System Power	Beam Angle	CCT	CRI	System Output	System Power	Beam Angle
2700	90	451	8	18°	2700	90	681	11	18°	2700	90	910	14	18°
2700	90	444	8	36°	2700	90	669	11	36°	2700	90	895	14	36°
2700	90	429	8	50°	2700	90	647	11	50°	2700	90	865	14	50°
3000	90	472	8	18°	3000	90	715	11	18°	3000	90	951	14	18°
3000	90	464	8	36°	3000	90	704	11	36°	3000	90	936	14	36°
3000	90	449	8	50°	3000	90	680	11	50°	3000	90	905	14	50°
4000	90	500	8	18°	4000	90	750	11	18°	4000	90	1000	14	18°
4000	90	492	8	36°	4000	90	738	11	36°	4000	90	984	14	36°
4000	90	475	8	50°	4000	90	713	11	50°	4000	90	951	14	50°

Please note: The above data is based on a black baffle, please contact sales for the data on other colour variants

Code Builder

Model	Bezel	Baffle	Accessories	Engine	CCT	Power	Beam Angle	Control	Emergency
APRASNT	White (W)	White (W)	Honeycomb (HC)	LE5	2700 (27)	8W (8)	18° (18)	Switched (S)	Std Emergency (EM)
		Black (B)	Frosted Glass (FG)		3000 (30)	11W (11)	36° (36)	Phase Dim (PD)	Self Test (EMST)
			Clear Glass (CG)		4000 (40)	14W (14)	50° (50)	DALI (D)	DALI (EMD)
			Fire Rated (FR90)					Casambi (C)	

** Inner baffle standard as black**

Please note: Specification Values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/ down for illustrative purposes. We reserve the right to amend or change details without prior notification