


ARCH PRO

Round Adjustable Trimless

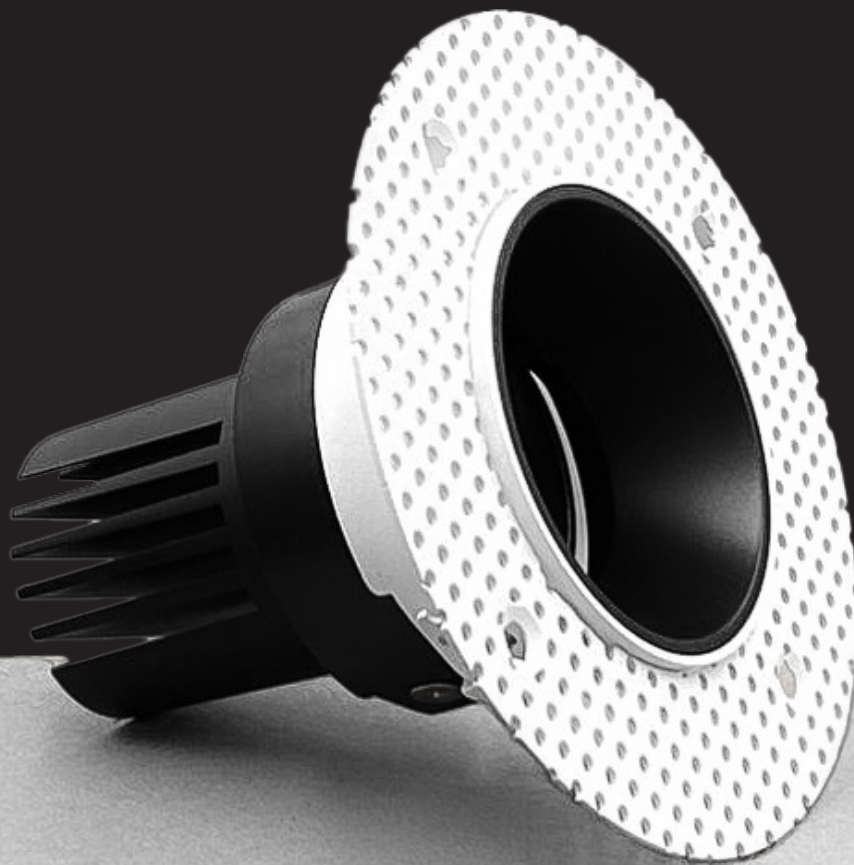

Chiara Lighting Ltd,
Unit 14E Club Lane,
Calderdale Business Park,
Calderdale
HX2 8DB

Tel: +44 (0)330 0571 888

Email: Hello@chiaralighting.com

Web: www.chiaralighting.com





Project Name _____

Luminaire Ref _____

Date _____


Arch Pro Round Adjustable - Trimless

Part of the Arch PRO family, the Round Adjustable Trimless is perfect for use in hospitality, residential and leisure applications. With interchangeable components, you can select from a range of colours, light sources, and accessories to create a bespoke solution. For easy tool-free maintenance, the light source is accessible from below.

Product Details

Mains Voltage (V)	230-240v
Mains Frequency (Hz)	50-60 Hz
CRI (Ra)	92
Binning (SDCM)	3
Operating Temp (C°)	-20° to +40°
Ingress Protection	IP20
LED Lifetime	50,000hrs L80 B10
Optical Control	Optical Lens (PC)
Body	Die Cast Aluminium/ Injection moulded PC
Warranty	5 Years

Dimensions

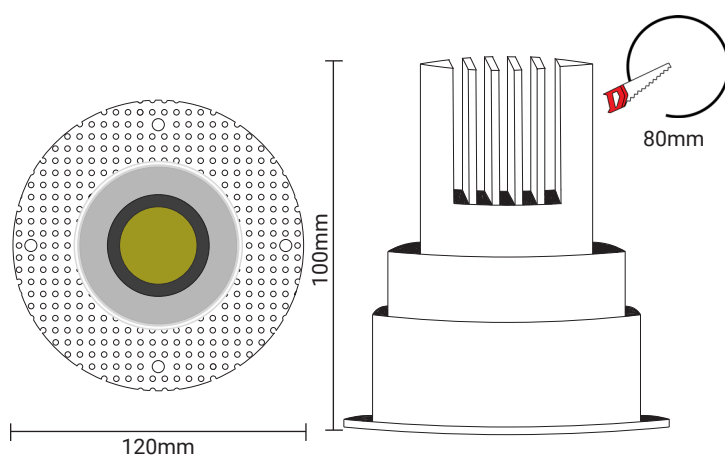

Technical Specification

CCT	CRI	System Output	System Power	Beam Angle	CCT	CRI	System Output	System Power	Beam Angle	CCT	CRI	System Output	System Power	Beam Angle
2700	90	487	8	18°	2700	90	734	11	18°	2700	90	981	14	18°
2700	90	479	8	36°	2700	90	722	11	36°	2700	90	965	14	36°
2700	90	463	8	50°	2700	90	698	11	50°	2700	90	933	14	50°
3000	90	509	8	18°	3000	90	771	11	18°	3000	90	1026	14	18°
3000	90	501	8	36°	3000	90	759	11	36°	3000	90	1009	14	36°
3000	90	484	8	50°	3000	90	733	11	50°	3000	90	976	14	50°
4000	90	539	8	18°	4000	90	809	11	18°	4000	90	1078	14	18°
4000	90	530	8	36°	4000	90	796	11	36°	4000	90	1061	14	36°
4000	90	513	8	50°	4000	90	769	11	50°	4000	90	1025	14	50°

Please note: The above data is based on a black baffle, please contact sales for the data on other colour variants

Code Builder

Model	Bezel	Baffle	Accessories	Engine	CCT	Power	Beam Angle	Control	Emergency
APRAT	White (W)	White (W)	Honeycomb (HC)	LE5	2700 (27)	8W (8)	18° (18)	Switched (S)	Std Emergency (EM)
		Black (B)	Frosted Glass (FG)		3000 (30)	11W (11)	36° (36)	Phase Dim (PD)	Self Test (EMST)
		Matt (M)	Clear Glass (CG)		4000 (40)	14W (14)	50° (50)	DALI (D)	DALI (EMD)
		Gold (G)	Fire Rated (FR90)					Casambi (C)	

Please note: Specification Values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/ down for illustrative purposes. We reserve the right to amend or change details without prior notification