

Pure Art Surface

Ceiling Mounted Ø55mm Spot





Project Name _____

Luminaire Ref _____

Date _____


Pure Art Surface - Ceiling Mounted Spot

The Pure range offers ceiling mounted LED spotlights with click-in feature which allows for easy installation. Ideal for office, commercial, leisure, hospitality and retail applications. With a variety of beam angles available, the Pure range is available in black or white with a black anti-glare ring at the front of the housing to optimize visual comfort.

Product Details

Mains Voltage (V)	230-240v
Mains Frequency (Hz)	50-60 Hz
CRI (Ra)	90
Binning (SDCM)	3
Operating Temp (C°)	-20° to +40°
Ingress Protection	IP20
LED Lifetime	50,000hrs L80 B10
Optical Control	Optical Lens (PC)
Body	Die Cast Aluminium/ Injection moulded PC
Warranty	5 Years

Dimensions

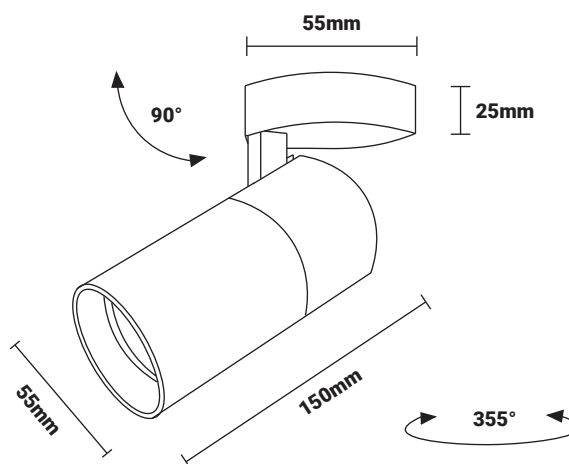

Technical Specification

CCT	CRI	System Output	System Power	Beam Angle
2700	90	640	11	18°
2700	90	640	11	24°
2700	90	640	11	36°
2700	90	640	11	50°
3000	90	720	11	18°
3000	90	720	11	24°
3000	90	720	11	36°
3000	90	720	11	50°
4000	90	800	11	18°
4000	90	800	11	24°
4000	90	800	11	36°
4000	90	800	11	50°

CCT	CRI	System Output	System Power	Beam Angle
2700	90	900	15	18°
2700	90	900	15	24°
2700	90	900	15	36°
2700	90	900	15	50°
3000	90	950	15	18°
3000	90	950	15	24°
3000	90	950	15	36°
3000	90	950	15	50°
4000	90	1000	15	18°
4000	90	1000	15	24°
4000	90	1000	15	36°
4000	90	1000	15	50°

Code Builder

Model	Mounting	Body	Baffle	CRI	CCT	Power	Beam Angle	Control
PureArt	Surface (S)	White (W)	Black (B)	90 (9)	2700 (27)	11W (11)	18° (18)	Switched (S)
		Black (B)			3000 (30)	15W (15)	24° (24)	Phase Dim (PD)
					4000 (40)		36° (36)	
							50° (50)	

Please note: Specification Values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/ down for illustrative purposes. We reserve the right to amend or change details without prior notification