

ARCH PRO

Adjustable Surface Mount



Chiara Lighting Ltd,
Unit 14E Club Lane,
Calderdale Business Park,
Calderdale
HX2 8DB

Tel: +44 (0)330 0571 888

Email: Hello@chiaralighting.com

Web: www.chiaralighting.com





Project Name _____

Luminaire Ref _____

Date _____


Arch Pro Round Adjustable - Surface Mount

With a deep recessed light source for optimum glare control and visual comfort, the ArchPRO Round Adjustable Surface Mount is ideal for use in hospitality, residential and leisure applications. The sleek diecast aluminium body offers an easy-install, surface-mounted option for any lighting scheme. For easy tool-free maintenance, the light source is accessible from below.

Product Details

Mains Voltage (V)	230-240v
Mains Frequency (Hz)	50-60 Hz
CRI (Ra)	92
Binning (SDCM)	3
Operating Temp (C°)	-20° to +40°
Ingress Protection	IP20
LED Lifetime	54,000hrs L70 B50
Optical Control	Optical Lens (PC)
Body	Die Cast Aluminium/ Injection moulded PC
Warranty	5 Years

Dimensions

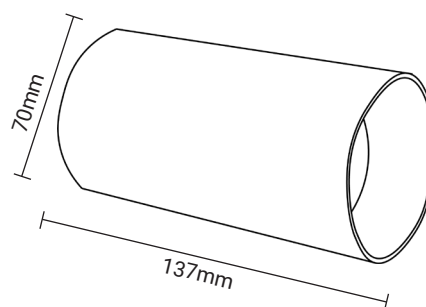

Technical Specification

CCT	CRI	System Output	System Power	Beam Angle
2700	90	638	9.4	12°
2700	90	638	9.4	24°
2700	90	638	9.4	36°
3000	90	662	9.4	12°
3000	90	662	9.4	24°
3000	90	662	9.4	36°
4000	90	690	9.4	12°
4000	90	690	9.4	24°
4000	90	690	9.4	36°

Please note: The above data is based on a black baffle, please contact sales for the data on other colour variants

Code Builder

Model	Bezel	Baffle	Accessories	Engine	CCT	Power	Beam Angle	Control	Emergency
APASM	White (W)	White (W)	Honeycomb (HC)	LE1AC	2700 (27)	9.4W (9)	12° (12)	Phase Dim (PD)	N/a
	Black (B)	Black (B)	Frosted Glass (FG)		3000 (30)		24° (24)		
		Matt (M)	Clear Glass (CG)		4000 (40)		36° (36)		
		Gold (G)							

Please note: Specification Values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/ down for illustrative purposes. We reserve the right to amend or change details without prior notification