

ARCH PRO

Square Adjustable



Chiara Lighting Ltd,
Unit 14E Club Lane,
Calderdale Business Park,
Calderdale
HX2 8DB

Tel: +44 (0)330 0571 888

Email: Hello@chiaralighting.com

Web: www.chiaralighting.com





Project Name _____

Luminaire Ref _____

Date _____


Arch Pro Square Adjustable - Recessed

Featuring a deep angular recessed baffle and adjustable to create a dynamic scheme, the Arch Pro Square Adjustable is a great choice for hospitality, residential and leisure applications. With customisable and interchangeable components, plus a selection of light sources, this modular downlight can be created bespoke to the customer's requirements. The light source is accessible from below allowing for tool-free easy maintenance.

Product Details

Mains Voltage (V)	230-240v
Mains Frequency (Hz)	50-60 Hz
CRI (Ra)	92
Binning (SDCM)	3
Operating Temp (C°)	-20° to +40°
Ingress Protection	IP20
LED Lifetime	50,000hrs L80 B10
Optical Control	Optical Lens (PC)
Body	Die Cast Aluminium/ Injection moulded PC
Warranty	5 Years

Dimensions

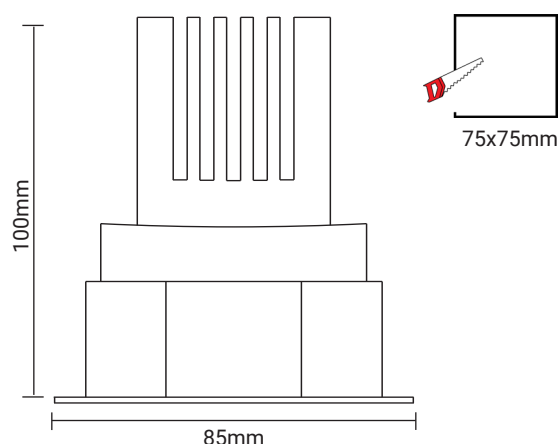

Technical Specification

CCT	CRI	System Output	System Power	Beam Angle	CCT	CRI	System Output	System Power	Beam Angle	CCT	CRI	System Output	System Power	Beam Angle
2700	90	525	8	18°	2700	90	791	11	18°	2700	90	1057	14	18°
2700	90	516	8	36°	2700	90	778	11	36°	2700	90	1040	14	36°
2700	90	499	8	50°	2700	90	752	11	50°	2700	90	1005	14	50°
3000	90	549	8	18°	3000	90	831	11	18°	3000	90	1106	14	18°
3000	90	540	8	36°	3000	90	818	11	36°	3000	90	1088	14	36°
3000	90	522	8	50°	3000	90	790	11	50°	3000	90	1051	14	50°
4000	90	581	8	18°	4000	90	872	11	18°	4000	90	1162	14	18°
4000	90	572	8	36°	4000	90	857	11	36°	4000	90	1143	14	36°
4000	90	553	8	50°	4000	90	829	11	50°	4000	90	1105	14	50°

Please note: The above data is based on a black baffle, please contact sales for the data on other colour variants

Code Builder

Model	Bezel	Baffle	Accessories	Engine	CCT	Power	Beam Angle	Control	Emergency
APSQA	White (W)	White (W)	Honeycomb (HC)	LE5	2700 (27)	8W (8)	18° (18)	Switched (S)	Std Emergency (EM)
	Black (B)	Black (B)	Frosted Glass (FG)		3000 (30)	11W (11)	36° (36)	Phase Dim (PD)	Self Test (EMST)
		Matt (M)	Clear Glass (CG)		4000 (40)	14W (14)	50° (50)	DALI (D)	DALI (EMD)
		Gold (G)						Casambi (C)	

Please note: Specification Values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/ down for illustrative purposes. We reserve the right to amend or change details without prior notification