

ARCH PRO

Square Twin Adjustable





Project Name _____

Luminaire Ref _____

Date _____


Arch Pro Square Twin Adjustable - Recessed

Featuring deep angular recessed baffles and adjustable to create a dynamic scheme, the Arch Pro Square Twin Adjustable is a great choice for residential and leisure applications. The twin frame works in conjunction with our modular ArchPRO Square range and is available as standard or trimless and in all standard colour options. For easy tool-free maintenance, the light source is accessible from below.

Product Details

Mains Voltage (V)	230-240v
Mains Frequency (Hz)	50-60 Hz
CRI (Ra)	92
Binning (SDCM)	3
Operating Temp (C°)	-20° to +40°
Ingress Protection	IP20
LED Lifetime	50,000hrs L80 B10
Optical Control	Optical Lens (PC)
Body	Die Cast Aluminium/ Injection moulded PC
Warranty	5 Years

Dimensions

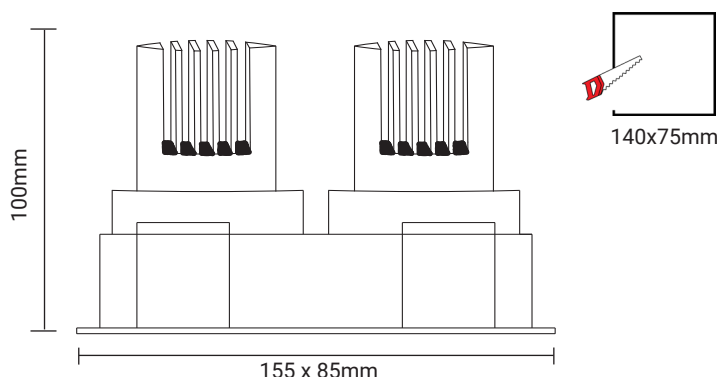

Technical Specification

CCT	CRI	System Output	System Power	Beam Angle	CCT	CRI	System Output	System Power	Beam Angle	CCT	CRI	System Output	System Power	Beam Angle
2700	90	2 x 525	8	18°	2700	90	2 x 791	11	18°	2700	90	2 x 1057	14	18°
2700	90	2 x 516	8	36°	2700	90	2 x 778	11	36°	2700	90	2 x 1040	14	36°
2700	90	2 x 499	8	50°	2700	90	2 x 752	11	50°	2700	90	2 x 1005	14	50°
3000	90	2 x 549	8	18°	3000	90	2 x 831	11	18°	3000	90	2 x 1106	14	18°
3000	90	2 x 540	8	36°	3000	90	2 x 818	11	36°	3000	90	2 x 1088	14	36°
3000	90	2 x 522	8	50°	3000	90	2 x 790	11	50°	3000	90	2 x 1051	14	50°
4000	90	2 x 581	8	18°	4000	90	2 x 872	11	18°	4000	90	2 x 1162	14	18°
4000	90	2 x 572	8	36°	4000	90	2 x 857	11	36°	4000	90	2 x 1143	14	36°
4000	90	2 x 553	8	50°	4000	90	2 x 829	11	50°	4000	90	2 x 1105	14	50°

Please note: The above data is based on a black baffle, please contact sales for the data on other colour variants

Code Builder

Model	Bezel	Baffle	Accessories	Engine	CCT	Power	Beam Angle	Control	Emergency
APSQTA	White (W)	White (W)	Honeycomb (HC)	LE5	2700 (27)	2 x 8W (8)	2 x 18° (18)	Switched (S)	Std Emergency (EM)
	Black (B)	Black (B)	Frosted Glass (FG)		3000 (30)	2 x 11W (11)	2 x 36° (36)	Phase Dim (PD)	Self Test (EMST)
		Matt (M)	Clear Glass (CG)		4000 (40)	2x 14W (14)	2 x 50° (50)	DALI (D)	DALI (EMD)
		Gold (G)						Casambi (C)	

Please note: Specification Values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/ down for illustrative purposes. We reserve the right to amend or change details without prior notification