

Game 450

450mm Feature Light





Project Name _____

Luminaire Ref _____

Date _____

Game 450 Direct only - Surface / Suspended / Wall Mount

The Game feature pendant light offers 4 different sizes alongside the classical flat design. The reduced design in circular form available in black or white fits elegantly and harmoniously into the architecture. With different configuration options, such as four different sizes and a balanced colour selection, the Game provides either strong accents or restrained lighting. The microprismatic cover ensures optimal working light with high visual comfort with an optimal UGR value of 19. During the development of the Game series, great importance was attached to the use of innovative technologies as well as a simple installation for the customer

Product Details


Mains Voltage (V)	230-240v	Binning (SDCM)	3	Ingress Protection	40	Body	Aluminium
Mains Frequency (Hz)	50-60 Hz	Operating Temp (C°)	-20° to 40°	LED Lifetime	50,000hrs L80 B10	Warranty	5 Years

Technical Specification

CCT	CRI	System Output	System Power	Efficacy (LLM/W)
2700	80	2150	18	119.4
2700	80	3000	26	115.4
3000	80	2300	18	127.8
3000	80	3150	26	121.2
4000	80	2500	18	138.9
4000	80	3400	26	130.8

Please Note: The above data is based on using Ra80, please contact sales for the data on Ra90

Dimensional Drawing

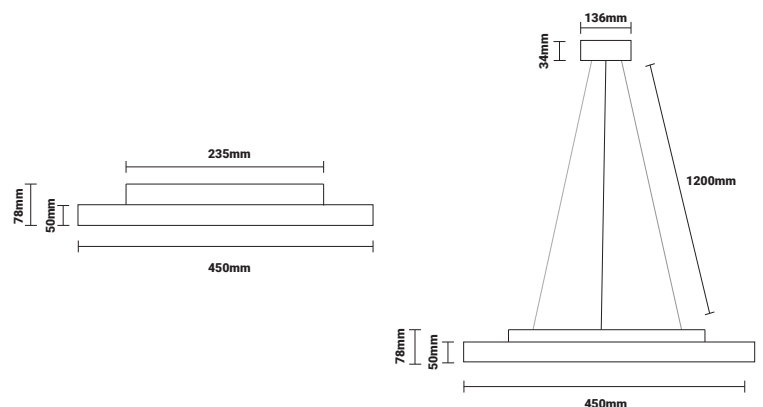

Code Builder

Model	Mounting	Body	Baffle	CRI	CCT	Power	Control	Emergency
Game450D	Surface (S)	White (W)	(N/A)	80 (8)	2700 (27)	18 (18)	Switched (S)	Std Emergency (EM)
	Suspended (SUS)	Black (B)		90 (9)	3000 (30)	26 (26)	Phase Dim (PD)	Self Test (EMST)
	Wall Mount (WM)				4000 (40)		DALI (D)	DALI (EMD)

Please note: Specification Values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/ down for illustrative purposes. We reserve the right to amend or change details without prior notification



Project Name _____

Luminaire Ref _____

Date _____

Game 450 Direct / Indirect - Surface / Suspended / Wall Mount

The Game feature pendant light offers 4 different sizes alongside the classical flat design. The reduced design in circular form available in black or white fits elegantly and harmoniously into the architecture. With different configuration options, such as four different sizes and a balanced colour selection, the Game provides either strong accents or restrained lighting. The microprismatic cover ensures optimal working light with high visual comfort with an optimal UGR value of 19. During the development of the Game series, great importance was attached to the use of innovative technologies as well as a simple installation for the customer

Product Details


Mains Voltage (V)	230-240v	Binning (SDCM)	3	Ingress Protection	40	Body	Aluminium
Mains Frequency (Hz)	50-60 Hz	Operating Temp (C°)	-20° to 40°	LED Lifetime	50,000hrs L80 B10	Warranty	5 Years

Technical Specification

CCT	CRI	System Output	System Power	Efficacy (LLM/W)
2700	80	3150	31	101.6
2700	80	4000	39	102.6
3000	80	3400	31	109.7
3000	80	4250	39	109.0
4000	80	3700	31	119.4
4000	80	4600	39	118.0

Please Note: The above data is based on using Ra80, please contact sales for the data on Ra90

Dimensional Drawing

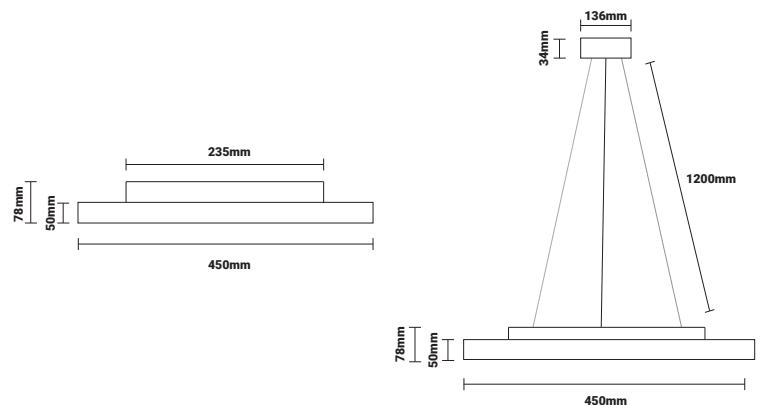

Code Builder

Model	Mounting	Body	Baffle	CRI	CCT	Power	Control	Emergency
Game450DI	Surface (S)	White (W)	(N/A)	80 (8)	2700 (27)	31 (31)	Switched (S)	(N/A)
	Suspended (SUS)	Black (B)		90 (9)	3000 (30)	39 (39)	Phase Dim (PD)	
	Wall Mount (WM)				4000 (40)		DALI (D)	

Please note: Specification Values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/ down for illustrative purposes. We reserve the right to amend or change details without prior notification