


Line50 Hex

50mm Hexagon Linear Profile



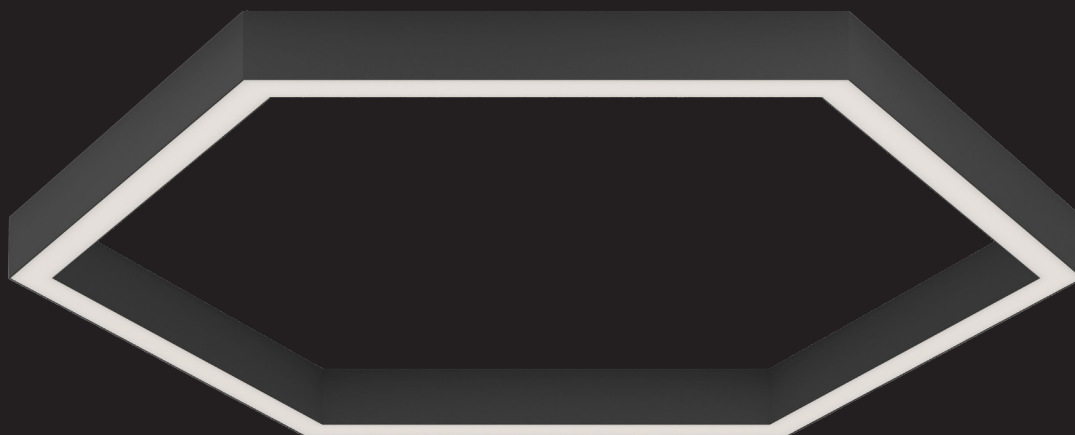

Project Name _____

Luminaire Ref _____

Date _____

Line50 Hex Direct only - Surface / Suspended

Our Popular Line50 profile system is now available in a variety of hexagonal sizes to suit your project. The Line50 Quad sets new standards in efficiency and quality with its impressive width of 50mm. Every Detail has been carefully designed from moulded endcaps to UGR compliant diffusers ensuring both efficiency and aesthetics meet every demand.

The Line50 relies on cutting edge LED technology to produce outstanding light quality and offer a range of intelligent integrated lighting controls and sensors to fulfill any project.

Product Details


Mains Voltage (V)	230-240v	Binning (SDCM)	3	Ingress Protection	20	Body	Aluminium
Mains Frequency (Hz)	50-60 Hz	Operating Temp (C°)	-20° to 40°	LED Lifetime	75,000hrs L80 B10	Warranty	5 Years

Technical Specification

CCT	Length (mm)	System Output	System Power	Efficacy (LLM/W)
4000	1306	10389	87.7	118.46
4000	2028	16619	134.8	123.29
4000	2988	24935	206.0	121.04

Please Note: The above data is based on using Ra80, 4000k boards running at maximum output with Opal Diffuser, please contact sales for the data on other variants

Dimensional Drawing

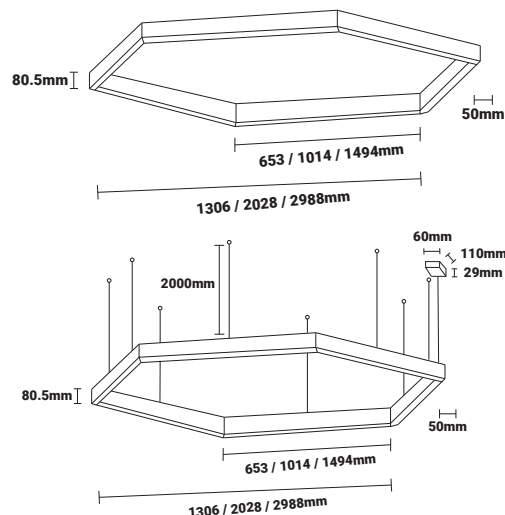

Code Builder

Model	Length	Mounting	Body	Optic	CRI	CCT	Control	Sensor	Emergency
L50D Hex	1306 (13)	Surface (S)	White (W)	Opal (OP)	80 (8)	2700 (27)	Switched (S)	Contact Sales	Std Emergency (EM)
	2028 (20)	Suspended (SUS)	Black (B)	Microprism (MP)	90 (9)	3000 (30)	DALI (D)	Contact Sales	Self Test (EMST)
	2988 (29)		Silver (S)			4000 (40)	Casambi (C)		DALI (EMD)
	Custom Size (Contact Sales)					2700-6500 (TW)			

Please note: Specification Values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/ down for illustrative purposes. We reserve the right to amend or change details without prior notification



Project Name _____

Luminaire Ref _____

Date _____

Line50 Hex Direct / Indirect - Suspended

Our Popular Line50 profile system is now available in a variety of hexagonal sizes to suit your project. The Line50 Quad sets new standards in efficiency and quality with its impressive width of 50mm. Every Detail has been carefully designed from moulded endcaps to UGR compliant diffusers ensuring both efficiency and aesthetics meet every demand.

The Line50 relies on cutting edge LED technology to produce outstanding light quality and offer a range of intelligent integrated lighting controls and sensors to fulfill any project.

Product Details


Mains Voltage (V)	230-240v	Binning (SDCM)	3	Ingress Protection	20	Body	Aluminium
Mains Frequency (Hz)	50-60 Hz	Operating Temp (C°)	-20° to 40°	LED Lifetime	75,000hrs L80 B10	Warranty	5 Years

Technical Specification

CCT	Length (mm)	System Output	System Power	Efficacy (LLM/W)
4000	1306	22566	175.4	128.65
4000	2028	37913	266.2	142.42
4000	2988	56864	399.3	142.41

Please Note: The above data is based on using Ra80, 4000k boards running at maximum output with Opal Diffuser, please contact sales for the data on other variants

Dimensional Drawing

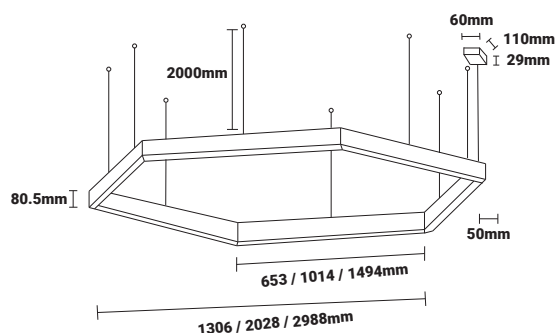

Code Builder

Model	Length	Mounting	Body	Optic	CRI	CCT	Control	Sensor	Emergency
L50DI Hex	1306 (13)	Suspended (SUS)	White (W)	Opal (OP)	80 (8)	2700 (27)	Switched (S)	Contact Sales	Std Emergency (EM)
	2028 (20)		Black (B)	Microprism (MP)	90 (9)	3000 (30)	DALI (D)		Self Test (EMST)
	2988 (29)		Silver (S)			4000 (40)	Casambi (C)		DALI (EMD)
	Custom Size (Contact Sales)					2700-6500 (TW)			

Please note: Specification Values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/ down for illustrative purposes. We reserve the right to amend or change details without prior notification