

Line50 Ring

50mm Ring Linear Profile





Project Name _____

Luminaire Ref _____

Date _____

Line50 Ring Linear Profile - Recessed

Our Popular Line50 profile system is now available in a variety of ring sizes to suit your project. The Line50 Quad sets new standards in efficiency and quality with its impressive width of 50mm. Every Detail has been carefully designed from moulded endcaps to UGR compliant diffusers ensuring both efficiency and aesthetics meet every demand.

The Line50 relies on cutting edge LED technology to produce outstanding light quality and offer a range of intelligent integrated lighting controls and sensors to fulfill any project.

Product Details


Mains Voltage (V)	230-240v	Binning (SDCM)	3	Ingress Protection	20	Body	Aluminium
Mains Frequency (Hz)	50-60 Hz	Operating Temp (C°)	-20° to 40°	LED Lifetime	75,000hrs L80 B10	Warranty	5 Years

Technical Specification

CCT	Length (mm)	System Output	System Power	Efficacy (LLM/W)
4000	888	5523	45.6	121.11
4000	1233	7919	66.3	119.44
4000	1588	10212	86.6	117.92
4000	2033	13546	113.2	119.66
4000	3103	20840	178.0	117.07
4000	4083	27092	238.0	113.83
4000	5063	35428	298.0	118.88
4000	6088	41055	357.0	115.00

Please Note: The above data is based on using Ra80, 4000k boards running at maximum output with Opal Diffuser, please contact sales for the data on other variants

Dimensional Drawing

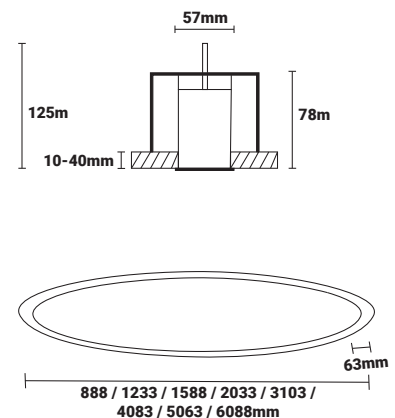

Code Builder

Model	Length	Mounting	Body	Optic	CRI	CCT	Control	Sensor	Emergency
L50 Ring	888 (8)	Recessed (R)	White (W)	Opal (OP)	80 (8)	2700 (27)	Switched (S)	Contact Sales	Std Emergency (EM)
	1233 (12)		Black (B)	Microprism (MP)	90 (9)	3000 (30)	DALI (D)		Self Test (EMST)
	1588 (15)		Silver (S)			4000 (40)	Casambi (C)		DALI (EMD)
	2033 (20)					2700-6500 (TW)			
	3103 (31)								
	4083 (40)								
	5063 (50)								
	6088 (60)								
	Custom Size (Contact Sales)								

Please note: Specification Values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/ down for illustrative purposes. We reserve the right to amend or change details without prior notification



Project Name _____

Luminaire Ref _____

Date _____

Line50 Ring Direct only - Surface / Suspended

Our Popular Line50 profile system is now available in a variety of ring sizes to suit your project. The Line50 Quad sets new standards in efficiency and quality with its impressive width of 50mm. Every Detail has been carefully designed from moulded endcaps to UGR compliant diffusers ensuring both efficiency and aesthetics meet every demand.

The Line50 relies on cutting edge LED technology to produce outstanding light quality and offer a range of intelligent integrated lighting controls and sensors to fulfill any project.

Product Details


Mains Voltage (V)	230-240v	Binning (SDCM)	3	Ingress Protection	20	Body	Aluminium
Mains Frequency (Hz)	50-60 Hz	Operating Temp (C°)	-20° to 40°	LED Lifetime	75,000hrs L80 B10	Warranty	5 Years

Technical Specification

CCT	Length (mm)	System Output	System Power	Efficacy (LLM/W)
4000	875	5523	45.6	121.11
4000	1220	7919	66.3	119.44
4000	1575	10212	86.6	117.92
4000	2020	13546	113.2	119.66
4000	3090	20840	178.0	117.07
4000	4070	27092	238.0	113.83
4000	5050	35428	298.0	118.88
4000	6075	41055	357.0	115.00

Please Note: The above data is based on using Ra80, 4000k boards running at maximum output with Opal Diffuser, please contact sales for the data on other variants

Dimensional Drawing

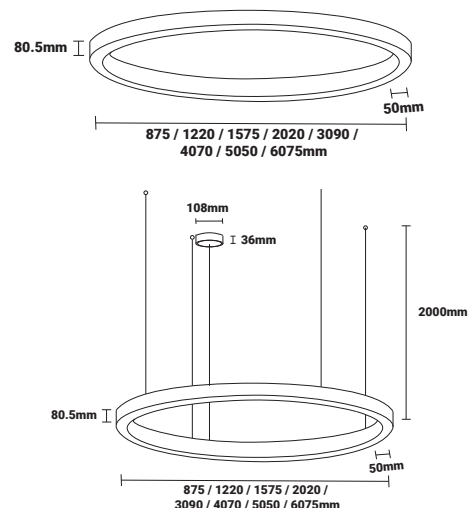

Code Builder

Model	Length	Mounting	Body	Optic	CRI	CCT	Control	Sensor	Emergency
L50D Ring	875 (8)	Surface (S)	White (W)	Opal (OP)	80 (8)	2700 (27)	Switched (S)	Contact Sales	Std Emergency (EM)
	1220 (12)	Suspended (SUS)	Black (B)	Microprism (MP)	90 (9)	3000 (30)	DALI (D)		Self Test (EMST)
	1575 (15)		Silver (S)			4000 (40)	Casambi (C)		DALI (EMD)
	2020 (20)					2700-6500 (TW)			
	3090 (31)								
	4070 (40)								
	5050 (50)								
	6075 (60)								
	Custom Size (Contact Sales)								

Please note: Specification Values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/ down for illustrative purposes. We reserve the right to amend or change details without prior notification



Project Name _____

Luminaire Ref _____

Date _____

Line50 Ring Direct / Indirect - Suspended

Our Popular Line50 profile system is now available in a variety of ring sizes to suit your project. The Line50 Quad sets new standards in efficiency and quality with its impressive width of 50mm. Every Detail has been carefully designed from moulded endcaps to UGR compliant diffusers ensuring both efficiency and aesthetics meet every demand.

The Line50 relies on cutting edge LED technology to produce outstanding light quality and offer a range of intelligent integrated lighting controls and sensors to fulfill any project.

Product Details


Mains Voltage (V)	230-240v	Binning (SDCM)	3	Ingress Protection	20	Body	Aluminium
Mains Frequency (Hz)	50-60 Hz	Operating Temp (C°)	-20° to 40°	LED Lifetime	75,000hrs L80 B10	Warranty	5 Years

Technical Specification

CCT	Length (mm)	System Output	System Power	Efficacy (LLM/W)
4000	875	8438	66.7	126.51
4000	1220	12073	95.1	126.95
4000	1575	15567	122.1	127.49
4000	2020	20651	161.6	127.79
4000	3090	31770	250.0	127.08
4000	4070	41301	325.5	126.88
4000	5050	54009	414.6	130.26
4000	6075	62587	488.3	128.17

Please Note: The above data is based on using Ra80, 4000k boards running at maximum output with Opal Diffuser, please contact sales for the data on other variants

Dimensional Drawing

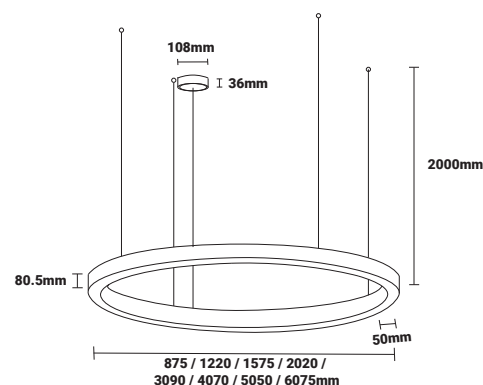

Code Builder

Model	Length	Mounting	Body	Optic	CRI	CCT	Control	Sensor	Emergency
L50DI Ring	875 (8)	Suspended (SUS)	White (W)	Opal (OP)	80 (8)	2700 (27)	Switched (S)	Contact Sales	Std Emergency (EM)
	1220 (12)		Black (B)	Microprism (MP)	90 (9)	3000 (30)	DALI (D)		Self Test (EMST)
	1575 (15)		Silver (S)			4000 (40)	Casambi (C)		DALI (EMD)
	2020 (20)					2700-6500 (TW)			
	3090 (31)								
	4070 (40)								
	5050 (50)								
	6075 (60)								
	Custom Size (Contact Sales)								

Please note: Specification Values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/ down for illustrative purposes. We reserve the right to amend or change details without prior notification