


ML26 AL

48v Multi Lens Insert



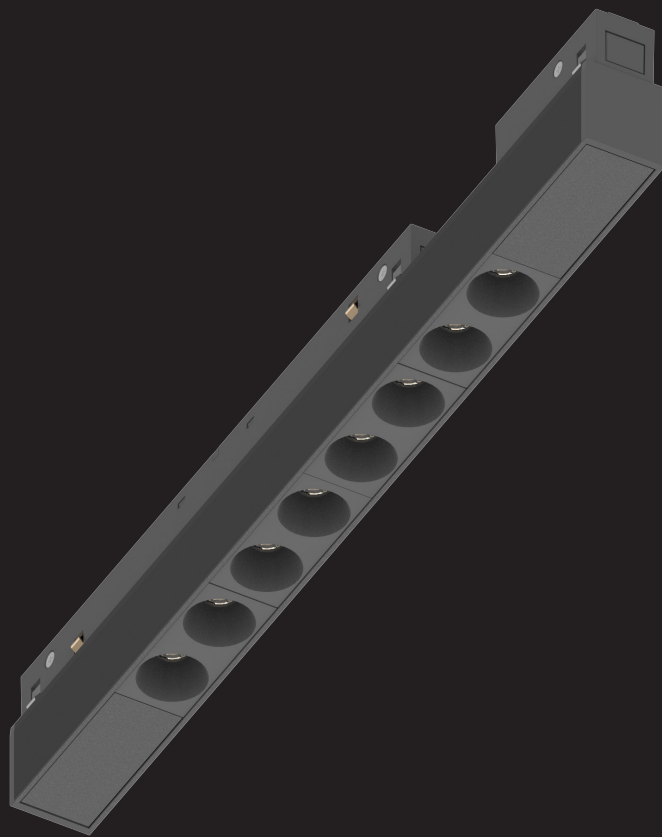

Project Name _____

Luminaire Ref _____

Date _____


ML26 AL190 - 48v Multi Lens Insert - 190mm

The Accent Light for the ML26 track can be flexibly selected in three different sizes and with five different wattages. The portfolio is complemented by an accent light that can be adjusted by 90° to each side. In addition, a glare-free and pleasant light was particularly important during the development, thanks to its glare index of <19.

Product Details

Mains Voltage (V)	230-240v
Mains Frequency (Hz)	50-60 Hz
CRI (Ra)	90
Binning (SDCM)	3
Operating Temp (C°)	-20° to +40°
Ingress Protection	IP20
LED Lifetime	50,000hrs L80 B10
Optical Control	Optical Lens PC
Body	Die Cast Aluminium/ Injection moulded PC
Warranty	5 Years

Dimensions

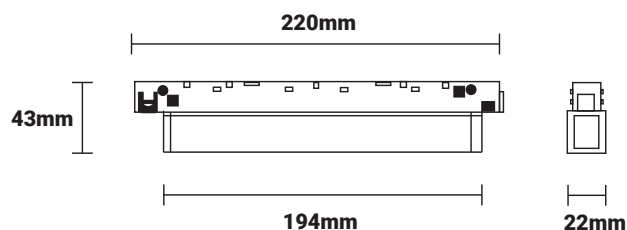

Technical Specification

CCT	CRI	System Output	System Power	Beam Angle
2700	90	170	3	20°
2700	90	170	3	35°
2700	90	160	3	55°
3000	90	180	3	20°
3000	90	180	3	35°
3000	90	170	3	55°
4000	90	200	3	20°
4000	90	200	3	35°
4000	90	190	3	55°

CCT	CRI	System Output	System Power	Beam Angle
2700	90	500	7	20°
2700	90	500	7	35°
2700	90	470	7	55°
3000	90	550	7	20°
3000	90	550	7	35°
3000	90	500	7	55°
4000	90	600	7	20°
4000	90	600	7	35°
4000	90	550	7	55°

Code Builder

Model	Body	Reflector	CRI	CCT	Power	Beam Angle	Control	Emergency
AL190	White (W)	Black (B)	90 (9)	2700 (27)	3W (3)	20° (20)	Switched (S)	N/A
	Black (B)			3000 (30)	7W (7)	35° (35)	DALI (D)	
				4000 (40)		55° (55)		

Please note: Specification Values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/ down for illustrative purposes. We reserve the right to amend or change details without prior notification



Project Name _____

Luminaire Ref _____

Date _____


ML26 AL280 - 48v Multi Lens Insert - 280mm

The Accent Light for the ML26 track can be flexibly selected in three different sizes and with five different wattages. The portfolio is complemented by an accent light that can be adjusted by 90° to each side. In addition, a glare-free and pleasant light was particularly important during the development, thanks to its glare index of <19.

Product Details

Mains Voltage (V)	230-240v
Mains Frequency (Hz)	50-60 Hz
CRI (Ra)	90
Binning (SDCM)	3
Operating Temp (C°)	-20° to +40°
Ingress Protection	IP20
LED Lifetime	50,000hrs L80 B10
Optical Control	Optical Lens PC
Body	Die Cast Aluminium/ Injection moulded PC
Warranty	5 Years

Dimensions

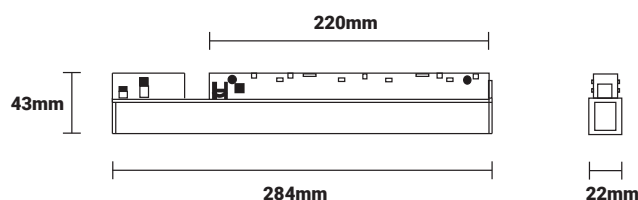

Technical Specification

CCT	CRI	System Output	System Power	Beam Angle
2700	90	700	9	20°
2700	90	700	9	35°
2700	90	650	9	55°
3000	90	750	9	20°
3000	90	750	9	35°
3000	90	680	9	55°
4000	90	800	9	20°
4000	90	800	9	35°
4000	90	750	9	55°

CCT	CRI	System Output	System Power	Beam Angle
2700	90	1000	13	20°
2700	90	1000	13	35°
2700	90	950	13	55°
3000	90	1100	13	20°
3000	90	1100	13	35°
3000	90	1000	13	55°
4000	90	1200	13	20°
4000	90	1200	13	35°
4000	90	1100	13	55°

Code Builder

Model	Body	Reflector	CRI	CCT	Power	Beam Angle	Control	Emergency		
AL280	White (W)	Black (B)	90 (9)	2700 (27)	9W (9)	20° (20)	Switched (S)	N/A		
	Black (B)			3000 (30)	13W (13)	35° (35)	DALI (D)			
				4000 (40)		55° (55)				

Please note: Specification Values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/ down for illustrative purposes. We reserve the right to amend or change details without prior notification



Project Name _____

Luminaire Ref _____

Date _____


ML26 AL560 - 48v Multi Lens Insert - 560mm

The Accent Light for the ML26 track can be flexibly selected in three different sizes and with five different wattages. The portfolio is complemented by an accent light that can be adjusted by 90° to each side. In addition, a glare-free and pleasant light was particularly important during the development, thanks to its glare index of <19.

Product Details

Mains Voltage (V)	230-240v
Mains Frequency (Hz)	50-60 Hz
CRI (Ra)	90
Binning (SDCM)	3
Operating Temp (C°)	-20° to +40°
Ingress Protection	IP20
LED Lifetime	50,000hrs L80 B10
Optical Control	Optical Lens PC
Body	Die Cast Aluminium/ Injection moulded PC
Warranty	5 Years

Dimensions

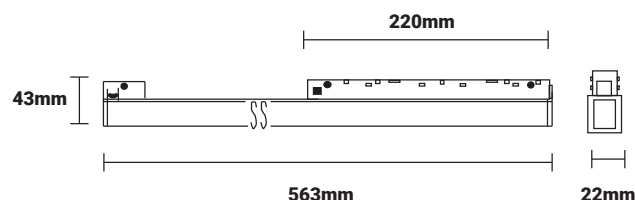

Technical Specification

CCT	CRI	System Output	System Power	Beam Angle
2700	90	220	26	20°
2700	90	2350	26	35°
2700	90	1900	26	55°
3000	90	2300	26	20°
3000	90	2450	26	35°
3000	90	2000	26	55°
4000	90	2400	26	20°
4000	90	2550	26	35°
4000	90	2100	26	55°

Code Builder

Model	Body	Reflector	CRI	CCT	Power	Beam Angle	Control	Emergency
AL560	White (W)	Black (B)	90 (9)	2700 (27)	26W (26)	20° (20)	Switched (S)	N/A
	Black (B)			3000 (30)		35° (35)	DALI (D)	
				4000 (40)		55° (55)		

Please note: Specification Values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/ down for illustrative purposes. We reserve the right to amend or change details without prior notification