


ML26 GL

48v Ambient Insert



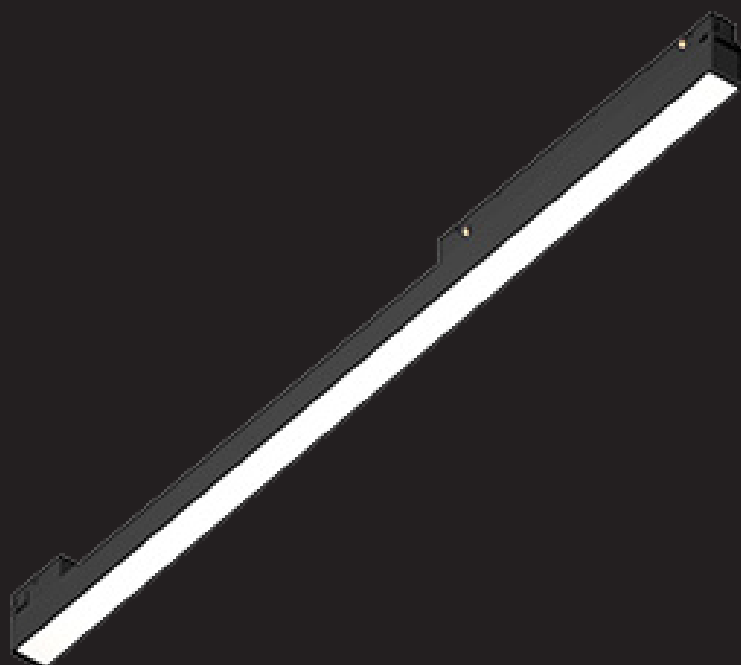

Project Name _____

Luminaire Ref _____

Date _____


ML26 GL280 - 48v Ambient Insert - 280mm

The General Light variants are available in four different sizes for the ML26 system to ensure a seamless transition of general lighting. From a length of the General Light of 284mm with 7W to a length of 1124mm with 26W, exciting lighting solutions can be created for a wide range of planning situations. Like the Accent Light, the General Light is available in an adjustable version of 90° to each side.

Product Details

Mains Voltage (V)	230-240v
Mains Frequency (Hz)	50-60 Hz
CRI (Ra)	90
Binning (SDCM)	3
Operating Temp (C°)	-20° to +40°
Ingress Protection	IP20
LED Lifetime	50,000hrs L80 B10
Optical Control	Optical Lens PC
Body	Die Cast Aluminium/ Injection moulded PC
Warranty	5 Years

Dimensions

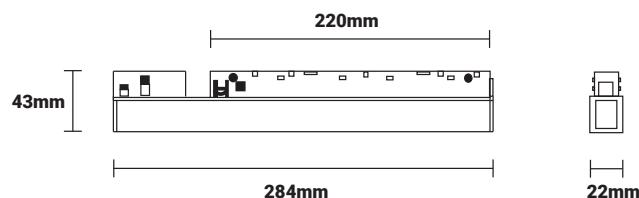

Technical Specification

CCT	CRI	System Output	System Power	Beam Angle
2700	90	430	7	110°
3000	90	400	7	110°
4000	90	450	7	110°

Code Builder

Model	Body	Reflector	CRI	CCT	Power	Beam Angle	Control	Emergency
GL280	White (W) Black (B)	N/A	90 (9)	2700 (27) 3000 (30) 4000 (40)	7W (7)	110° (110)	Switched (S) DALI (D)	N/A

Please note: Specification Values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/ down for illustrative purposes. We reserve the right to amend or change details without prior notification



Project Name _____

Luminaire Ref _____

Date _____


ML26 GL560 - 48v Ambient Insert - 560mm

The General Light variants are available in four different sizes for the ML26 system to ensure a seamless transition of general lighting. From a length of the General Light of 284mm with 7W to a length of 1124mm with 26W, exciting lighting solutions can be created for a wide range of planning situations. Like the Accent Light, the General Light is available in an adjustable version of 90° to each side.

Product Details

Mains Voltage (V)	230-240v
Mains Frequency (Hz)	50-60 Hz
CRI (Ra)	90
Binning (SDCM)	3
Operating Temp (C°)	-20° to +40°
Ingress Protection	IP20
LED Lifetime	50,000hrs L80 B10
Optical Control	Optical Lens PC
Body	Die Cast Aluminium/ Injection moulded PC
Warranty	5 Years

Dimensions

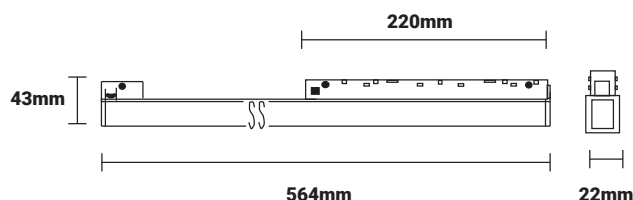

Technical Specification

CCT	CRI	System Output	System Power	Beam Angle
2700	90	750	13	110°
3000	90	800	13	110°
4000	90	900	13	110°

Code Builder

Model	Body	Reflector	CRI	CCT	Power	Beam Angle	Control	Emergency
GL560	White (W)	N/A	90 (9)	2700 (27)	13W (13)	110° (110)	Switched (S)	N/A
	Black (B)			3000 (30)			DALI (D)	
				4000 (40)				

Please note: Specification Values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/ down for illustrative purposes. We reserve the right to amend or change details without prior notification



Project Name _____

Luminaire Ref _____

Date _____


ML26 GL840 - 48v Ambient Insert - 840mm

The General Light variants are available in four different sizes for the ML26 system to ensure a seamless transition of general lighting. From a length of the General Light of 284mm with 7W to a length of 1124mm with 26W, exciting lighting solutions can be created for a wide range of planning situations. Like the Accent Light, the General Light is available in an adjustable version of 90° to each side.

Product Details

Mains Voltage (V)	230-240v
Mains Frequency (Hz)	50-60 Hz
CRI (Ra)	90
Binning (SDCM)	3
Operating Temp (C°)	-20° to +40°
Ingress Protection	IP20
LED Lifetime	50,000hrs L80 B10
Optical Control	Optical Lens PC
Body	Die Cast Aluminium/ Injection moulded PC
Warranty	5 Years

Dimensions

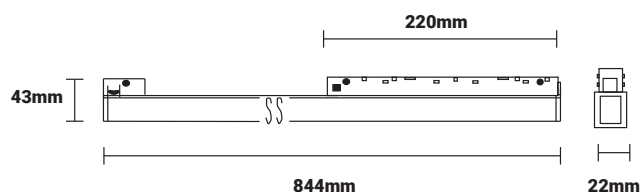

Technical Specification

CCT	CRI	System Output	System Power	Beam Angle
2700	90	1100	19	110°
3000	90	1200	19	110°
4000	90	1300	19	110°

Code Builder

Model	Body	Reflector	CRI	CCT	Power	Beam Angle	Control	Emergency
GL560	White (W) Black (B)	N/A	90 (9)	2700 (27) 3000 (30) 4000 (40)	19W (19)	110° (20)	Switched (S) DALI (D)	N/A

Please note: Specification Values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/ down for illustrative purposes. We reserve the right to amend or change details without prior notification



Project Name _____

Luminaire Ref _____

Date _____


ML26 GL1120 - 48v Ambient Insert - 1120mm

The General Light variants are available in four different sizes for the ML26 system to ensure a seamless transition of general lighting. From a length of the General Light of 284mm with 7W to a length of 1124mm with 26W, exciting lighting solutions can be created for a wide range of planning situations. Like the Accent Light, the General Light is available in an adjustable version of 90° to each side.

Product Details

Mains Voltage (V)	230-240v
Mains Frequency (Hz)	50-60 Hz
CRI (Ra)	90
Binning (SDCM)	3
Operating Temp (C°)	-20° to +40°
Ingress Protection	IP20
LED Lifetime	50,000hrs L80 B10
Optical Control	Optical Lens PC
Body	Die Cast Aluminium/ Injection moulded PC
Warranty	5 Years

Dimensions

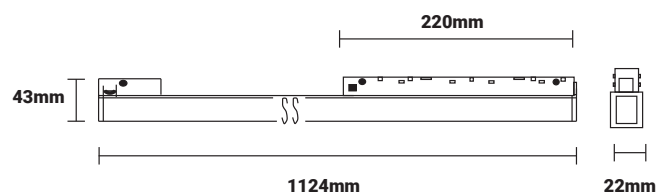

Technical Specification

CCT	CRI	System Output	System Power	Beam Angle
2700	90	2200	26	110°
3000	90	2400	26	110°
4000	90	2600	26	110°

Code Builder

Model	Body	Reflector	CRI	CCT	Power	Beam Angle	Control	Emergency
GL1120	White (W) Black (B)	(B)	90 (9)	2700 (27) 3000 (30) 4000 (40)	26W (26)	110° (110)	Switched (S) DALI (D)	N/A

Please note: Specification Values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/ down for illustrative purposes. We reserve the right to amend or change details without prior notification