

ML26 PB

48v Globe Pendant





Project Name _____

Luminaire Ref _____

Date _____


ML26 PB - Globe Pendant - Ø120mm and Ø150mm

The minimalist designed pendant luminaires of ML26 system ensure excellent accent lighting with the best light quality. With sizes of Ø120mm or Ø150mm, the Globe pendant offers a decorative feel to any environment whilst also providing a high level of visual comfort. Available in black or white finish, the Globe pendant is perfectly suitable for reading, writing as well as computer and control work.

Product Details

Mains Voltage (V)	230-240v
Mains Frequency (Hz)	50-60 Hz
CRI (Ra)	90
Binning (SDCM)	3
Operating Temp (C°)	-20° to +40°
Ingress Protection	IP20
LED Lifetime	50,000hrs L80 B10
Optical Control	Optical Lens (PC)
Body	Opal Glass
Warranty	5 Years

Dimensions

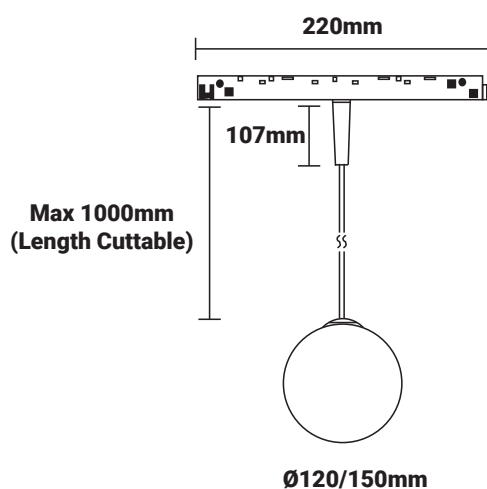

Technical Specification

CCT	Size	CRI	System Output	System Power
2700	120	90	400	5
3000	120	90	430	5
4000	120	90	470	5

CCT	Size	CRI	System Output	System Power
2700	150	90	470	7
3000	150	90	500	7
4000	150	90	550	7

Code Builder

Model	Body	Reflector	CRI	CCT	Power	Beam Angle	Control	Emergency
PB	White (W)	N/A	90 (9)	2700 (27)	Ø120 5W (5)	300° (30)	Switched (S)	N/A
	Black (B)			3000 (30)	Ø150 7W (7)		DALI (D)	
				4000 (40)				

Please note: Specification Values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/ down for illustrative purposes. We reserve the right to amend or change details without prior notification