

ML26 RS55

48v 55mm Spot Insert





Project Name _____

Luminaire Ref _____

Date _____


ML26 RS55 - 48v 55mm Spot Insert

With three different spotlight sizes ranging from Ø25mm, Ø40mm to Ø55mm, the spotlight modules of the ML26 system offer plenty of scope for designing exciting lighting solutions. The minimalist designed spots of the ML26 system ensure excellent accent lighting alongside a wide beam angle allowing different shapes and sizes of changing objects to be put into the right light with the best light quality. The low-set LED inside the spot provides a high level of visual comfort with a UGR value of <19.

Product Details

Mains Voltage (V)	230-240v
Mains Frequency (Hz)	50-60 Hz
CRI (Ra)	90
Binning (SDCM)	3
Operating Temp (C°)	-20° to +40°
Ingress Protection	IP20
LED Lifetime	50,000hrs L80 B10
Optical Control	Optical Lens PC
Body	Die Cast Aluminium/ Injection moulded PC
Warranty	5 Years

Dimensions

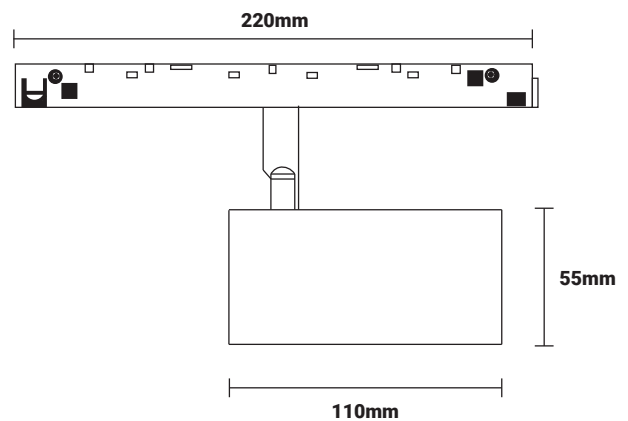

Technical Specification

CCT	CRI	System Output	System Power	Beam Angle
2700	90	14	1100	20°
2700	90	14	1100	30°
2700	90	14	1100	40°
2700	90	14	1050	50°

CCT	CRI	System Output	System Power	Beam Angle
3000	90	14	1200	20°
3000	90	14	1200	30°
3000	90	14	1200	40°
3000	90	14	1100	50°

CCT	CRI	System Output	System Power	Beam Angle
4000	90	14	1300	20°
4000	90	14	1300	30°
4000	90	14	1300	40°
4000	90	14	1200	50°

Code Builder

Model	Body	Reflector	CRI	CCT	Power	Beam Angle	Control	Emergency
RS55S	White (W)	Black (B)	90 (9)	2700 (27)	14W (14)	20° (20)	Switched (S)	N/A
	Black (B)			3000 (30)		30° (30)	DALI (D)	
				4000 (40)		40° (40)		
						50° (50)		

Please note: Specification Values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/ down for illustrative purposes. We reserve the right to amend or change details without prior notification