


Sugar 350

350mm Feature Light



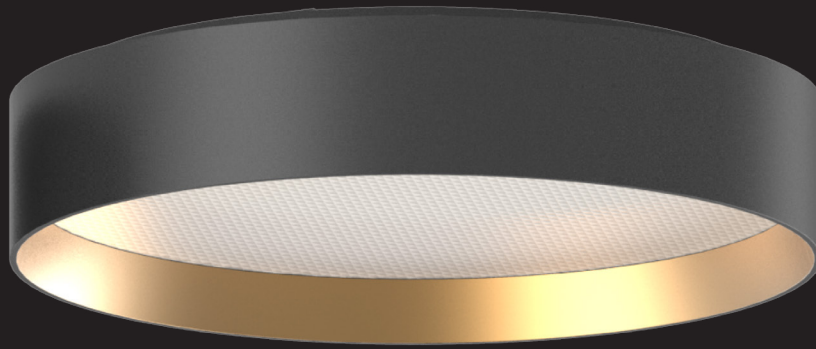

Project Name _____

Luminaire Ref _____

Date _____

Sugar 350 Direct only - Surface / Suspended / Wall Mount

The Sugar feature pendant light offers 4 different sizes alongside a selection of colours to ensure individual design possibilities. With the importance of innovative technologies as well as simple installation the Sugar is an exciting addition to lighting solutions. The reduced design in circular form in the classic housing colours in black or white fits elegantly and harmoniously into the architecture. For intended use in offices, hotels, meeting rooms, reception areas, the glare-free light with microprismatic optics offers a special aesthetic to every room.

Product Details


Mains Voltage (V)	230-240v	Binning (SDCM)	3	Ingress Protection	40	Body	Aluminium
Mains Frequency (Hz)	50-60 Hz	Operating Temp (C°)	-20° to 40°	LED Lifetime	50,000hrs L80 B10	Warranty	5 Years

Technical Specification

CCT	CRI	System Output	System Power	Efficacy (LLM/W)
2700	80	2000	14	142.8
2700	80	2500	18	138.8
3000	80	2100	14	150.0
3000	80	2700	18	150.0
4000	80	2300	14	164.3
4000	80	2900	18	161.1

Please Note: The above data is based on using Ra80, please contact sales for the data on Ra90

Dimensional Drawing

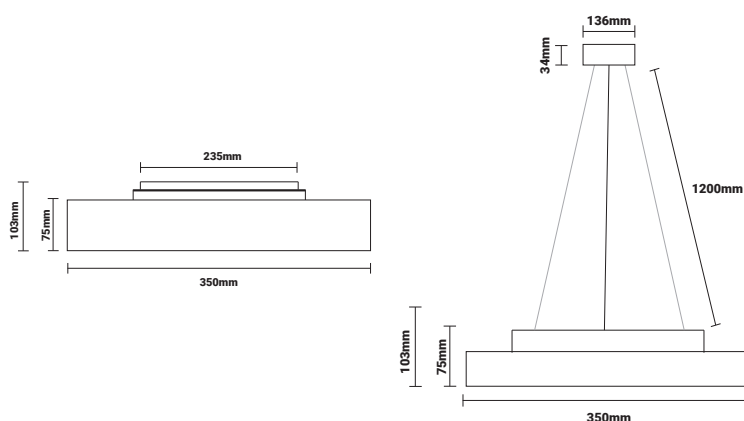

Code Builder

Model	Mounting	Body	Baffle	CRI	CCT	Power	Control	Emergency
Sugar350D	Surface (S)	White (W)	White (W)	80 (8)	2700 (27)	14 (14)	Switched (S)	Std Emergency (EM)
	Suspended (SUS)	Black (B)	Black (B)	90 (9)	3000 (30)	18 (18)	Phase Dim (PD)	Self Test (EMST)
	Wall Mount (WM)		Gold (G)		4000 (40)		DALI (D)	DALI (EMD)

Please note: Specification Values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/ down for illustrative purposes. We reserve the right to amend or change details without prior notification



Project Name _____

Luminaire Ref _____

Date _____

Sugar 350 Direct/ Indirect - Surface / Suspended / Wall

The Sugar feature pendant light offers 4 different sizes alongside a selection of colours to ensure individual design possibilities. With the importance of innovative technologies as well as simple installation the Sugar is an exciting addition to lighting solutions. The reduced design in circular form in the classic housing colours in black or white fits elegantly and harmoniously into the architecture. For intended use in offices, hotels, meeting rooms, reception areas, the glare-free light with microprismatic optics offers a special aesthetic to every room.

Product Details


Mains Voltage (V)	230-240v	Binning (SDCM)	3	Ingress Protection	40	Body	Aluminium
Mains Frequency (Hz)	50-60 Hz	Operating Temp (C°)	-20° to 40°	LED Lifetime	50,000hrs L80 B10	Warranty	5 Years

Technical Specification

CCT	CRI	System Output	System Power	Efficacy (LLM/W)
2700	80	2950	24	122.9
2700	80	3450	28	123.2
3000	80	3100	24	129.2
3000	80	3700	28	132.1
4000	80	3400	24	141.7
4000	80	4000	28	142.9

Please Note: The above data is based on using Ra80, please contact sales for the data on Ra90

Dimensional Drawing

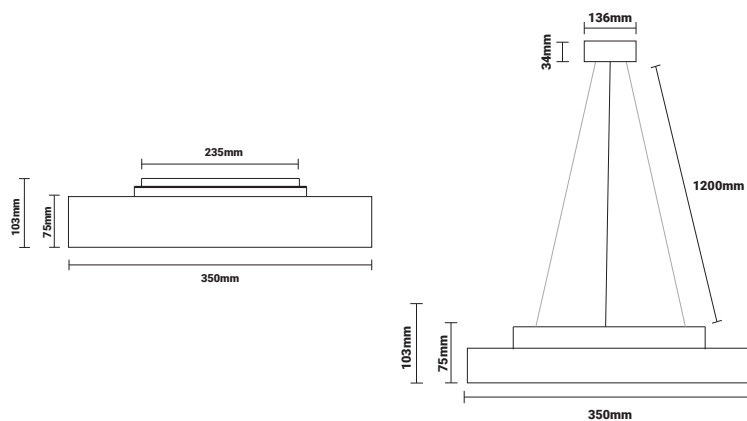

Code Builder

Model	Mounting	Body	Baffle	CRI	CCT	Power	Control	Emergency
Sugar350DI	Surface (S)	White (W)	White (W)	80 (8)	2700 (27)	24 (24)	Switched (S)	(N/A)
	Suspended (SUS)	Black (B)	Black (B)	90 (9)	3000 (30)	28 (28)	Phase Dim (PD)	
	Wall Mount (WM)		Gold (G)		4000 (40)		DALI (D)	

Please note: Specification Values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/ down for illustrative purposes. We reserve the right to amend or change details without prior notification