


Sugar 450

450mm Feature Light



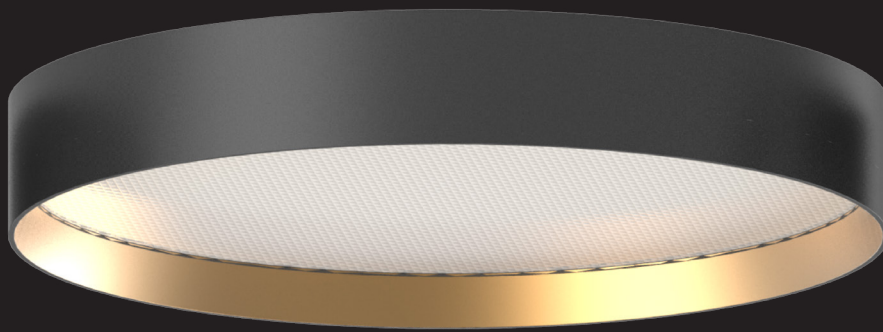

Project Name _____

Luminaire Ref _____

Date _____

Sugar 450 Direct only - Surface / Suspended / Wall Mount

The Sugar feature pendant light offers 4 different sizes alongside a selection of colours to ensure individual design possibilities. With the importance of innovative technologies as well as simple installation the Sugar is an exciting addition to lighting solutions. The reduced design in circular form in the classic housing colours in black or white fits elegantly and harmoniously into the architecture. For intended use in offices, hotels, meeting rooms, reception areas, the glare-free light with microprismatic optics offers a special aesthetic to every room.

Product Details


Mains Voltage (V)	230-240v	Binning (SDCM)	3	Ingress Protection	40	Body	Aluminium
Mains Frequency (Hz)	50-60 Hz	Operating Temp (C°)	-20° to 40°	LED Lifetime	50,000hrs L80 B10	Warranty	5 Years

Technical Specification

CCT	CRI	System Output	System Power	Efficacy (LLM/W)
2700	80	2400	18	133.3
2700	80	3500	26	134.6
3000	80	2600	18	144.4
3000	80	3700	26	142.3
4000	80	2800	18	155.6
4000	80	4000	26	153.8

Please Note: The above data is based on using Ra80, please contact sales for the data on Ra90

Dimensional Drawing

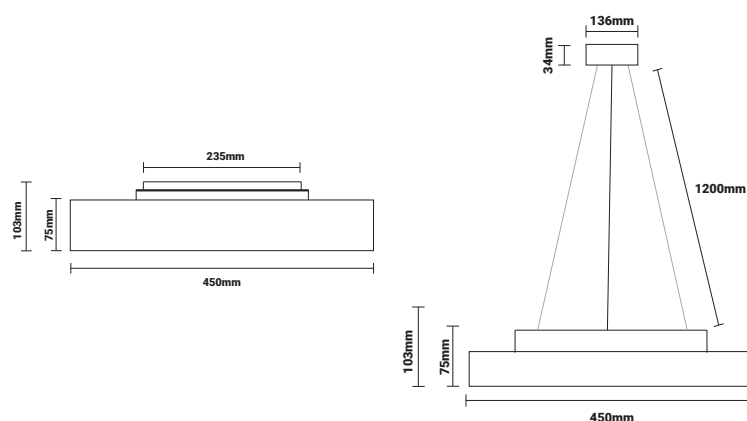

Code Builder

Model	Mounting	Body	Baffle	CRI	CCT	Power	Control	Emergency
Sugar450D	Surface (S)	White (W)	White (W)	80 (8)	2700 (27)	18 (18)	Switched (S)	Std Emergency (EM)
	Suspended (SUS)	Black (B)	Black (B)	90 (9)	3000 (30)	26 (26)	Phase Dim (PD)	Self Test (EMST)
	Wall Mount (WM)		Gold (G)		4000 (40)		DALI (D)	DALI (EMD)

Please note: Specification Values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/ down for illustrative purposes. We reserve the right to amend or change details without prior notification



Project Name _____

Luminaire Ref _____

Date _____

Sugar 450 Direct / Indirect - Surface / Suspended / Wall Mount

The Sugar feature pendant light offers 4 different sizes alongside a selection of colours to ensure individual design possibilities. With the importance of innovative technologies as well as simple installation the Sugar is an exciting addition to lighting solutions. The reduced design in circular form in the classic housing colours in black or white fits elegantly and harmoniously into the architecture. For intended use in offices, hotels, meeting rooms, reception areas, the glare-free light with microprismatic optics offers a special aesthetic to every room.

Product Details


Mains Voltage (V)	230-240v	Binning (SDCM)	3	Ingress Protection	40	Body	Aluminium
Mains Frequency (Hz)	50-60 Hz	Operating Temp (C°)	-20° to 40°	LED Lifetime	50,000hrs L80 B10	Warranty	5 Years

Technical Specification

CCT	CRI	System Output	System Power	Efficacy (LLM/W)
2700	80	3500	31	112.9
2700	80	4600	39	117.9
3000	80	3800	31	122.6
3000	80	4900	39	125.6
4000	80	4100	31	132.3
4000	80	5300	39	135.9

Please Note: The above data is based on using Ra80, please contact sales for the data on Ra90

Dimensional Drawing

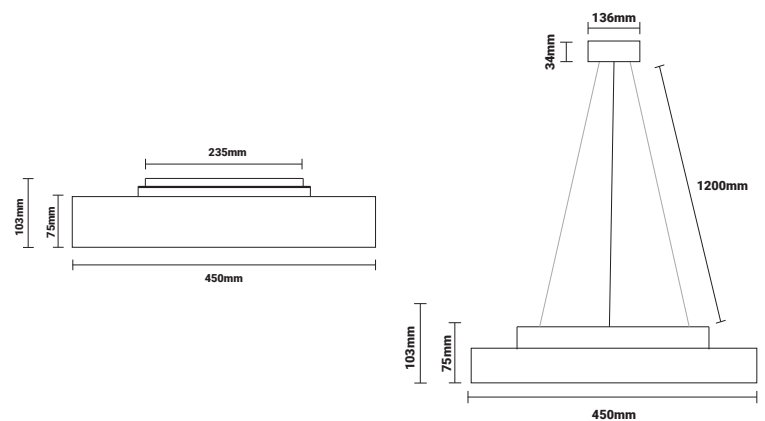

Code Builder

Model	Mounting	Body	Baffle	CRI	CCT	Power	Control	Emergency
Sugar450DI	Surface (S)	White (W)	White (W)	80 (8)	2700 (27)	31 (31)	Switched (S)	(N/A)
	Suspended (SUS)	Black (B)	Black (B)	90 (9)	3000 (30)	39 (39)	Phase Dim (PD)	
	Wall Mount (WM)		Gold (G)		4000 (40)		DALI (D)	

Please note: Specification Values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/ down for illustrative purposes. We reserve the right to amend or change details without prior notification