


Sugar 600

600mm Feature Light



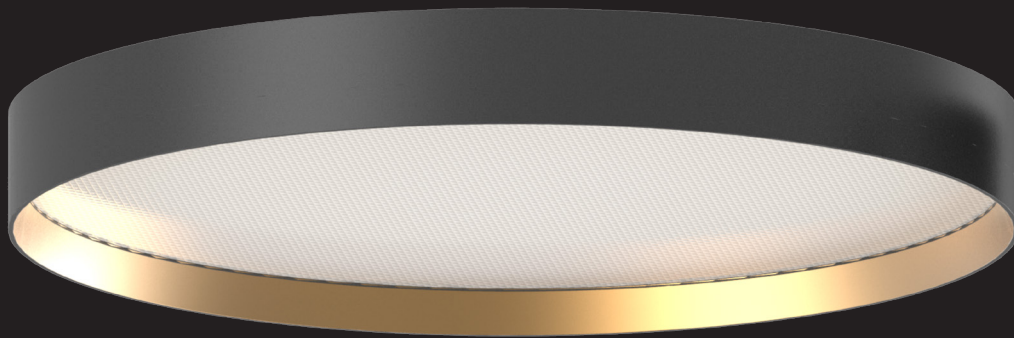

Project Name _____

Luminaire Ref _____

Date _____

Sugar 600 Direct only - Surface / Suspended / Wall Mount

The Sugar feature pendant light offers 4 different sizes alongside a selection of colours to ensure individual design possibilities. With the importance of innovative technologies as well as simple installation the Sugar is an exciting addition to lighting solutions. The reduced design in circular form in the classic housing colours in black or white fits elegantly and harmoniously into the architecture. For intended use in offices, hotels, meeting rooms, reception areas, the glare-free light with microprismatic optics offers a special aesthetic to every room.

Product Details


Mains Voltage (V)	230-240v	Binning (SDCM)	3	Ingress Protection	40	Body	Aluminium
Mains Frequency (Hz)	50-60 Hz	Operating Temp (C°)	-20° to 40°	LED Lifetime	50,000hrs L80 B10	Warranty	5 Years

Technical Specification

CCT	CRI	System Output	System Power	Efficacy (LLM/W)
2700	80	2850	26	109.6
2700	80	4750	40	118.8
2700	80	5850	50	117.0
3000	80	3000	26	115.4
3000	80	5000	40	125.0
3000	80	6150	50	123.0
4000	80	3300	26	126.9
4000	80	5300	40	132.5
4000	80	6700	50	134.0

Please Note: The above data is based on using Ra80, please contact sales for the data on Ra90

Dimensional Drawing

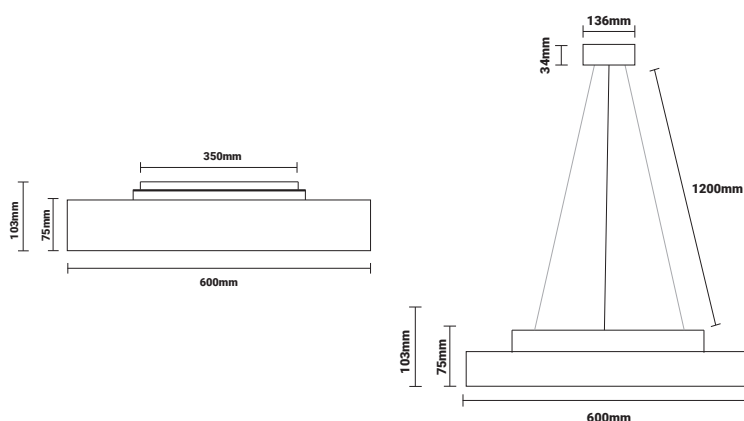

Code Builder

Model	Mounting	Body	Baffle	CRI	CCT	Power	Control	Emergency
Sugar600D	Surface (S)	White (W)	White (W)	80 (8)	2700 (27)	26 (26)	Switched (S)	Std Emergency (EM)
	Suspended (SUS)	Black (B)	Black (B)	90 (9)	3000 (30)	40 (40)	Phase Dim (PD)	Self Test (EMST)
	Wall Mount (WM)		Gold (G)		4000 (40)	50 (50)	DALI (D)	DALI (EMD)

Please note: Specification Values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/ down for illustrative purposes. We reserve the right to amend or change details without prior notification



Project Name _____

Luminaire Ref _____

Date _____

Sugar 600 Direct/ Indirect - Surface / Suspended / Wall Mount

The Sugar feature pendant light offers 4 different sizes alongside a selection of colours to ensure individual design possibilities. With the importance of innovative technologies as well as simple installation the Sugar is an exciting addition to lighting solutions. The reduced design in circular form in the classic housing colours in black or white fits elegantly and harmoniously into the architecture. For intended use in offices, hotels, meeting rooms, reception areas, the glare-free light with microprismatic optics offers a special aesthetic to every room.

Product Details


Mains Voltage (V)	230-240v	Binning (SDCM)	3	Ingress Protection	40	Body	Aluminium
Mains Frequency (Hz)	50-60 Hz	Operating Temp (C°)	-20° to 40°	LED Lifetime	50,000hrs L80 B10	Warranty	5 Years

Technical Specification

CCT	CRI	System Output	System Power	Efficacy (LLM/W)
2700	80	4650	46	101.1
2700	80	6550	60	109.2
2700	80	7450	70	106.4
3000	80	4700	46	102.2
3000	80	6700	60	111.7
3000	80	7850	70	112.1
4000	80	5100	46	110.9
4000	80	7100	60	118.3
4000	80	8500	70	121.4

Please Note: The above data is based on using Ra80, please contact sales for the data on Ra90

Dimensional Drawing

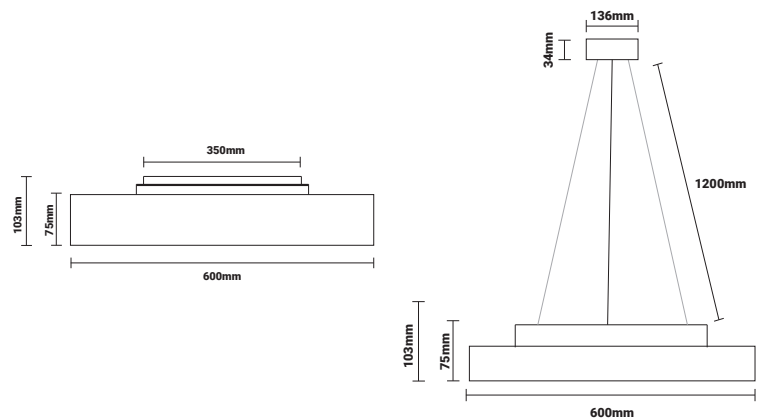

Code Builder

Model	Mounting	Body	Baffle	CRI	CCT	Power	Control	Emergency
Sugar600DI	Surface (S)	White (W)	White (W)	80 (8)	2700 (27)	46 (46)	Switched (S)	(N/A)
	Suspended (SUS)	Black (B)	Black (B)	90 (9)	3000 (30)	60 (60)	Phase Dim (PD)	
	Wall Mount (WM)		Gold (G)		4000 (40)	70 (70)	DALI (D)	

Please note: Specification Values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/ down for illustrative purposes. We reserve the right to amend or change details without prior notification