

Yumi

Y Shaped Decorative Linear





Project Name _____

Luminaire Ref _____

Date _____

Yumi 600mm - Surface / Suspended

Yumi brings a fresh feeling to every interior, with various mounting types. It gives you the opportunity to design freely, by placing multiple luminaires in playful compositions. Yumi is especially interesting because of its modularity. It can be strung together piece by piece to create impressive shapes. This modularity brings countless possible uses ranging from a single-light application to large scale light sculptures in projects.


Product Details

Mains Voltage (V)	230-240v	Binning (SDCM)	3	Ingress Protection	40	Body	Aluminium
Mains Frequency (Hz)	50-60 Hz	Operating Temp (C°)	-20° to 40°	LED Lifetime	50,000hrs L80 B10	Warranty	5 Years

Technical Specification

CCT	CRI	System Output	System Power	Efficacy (LLM/W)
3000	90	2822	27 (15W/m)	104.5
3000	90	4286	41 (23W/m)	104.5
3000	90	5645	54 (30W/m)	104.5
4000	90	3024	27 (15W/m)	112.0
4000	90	4592	41 (23W/m)	112.0
4000	90	6048	54 (30W/m)	112.0

Dimensional Drawing

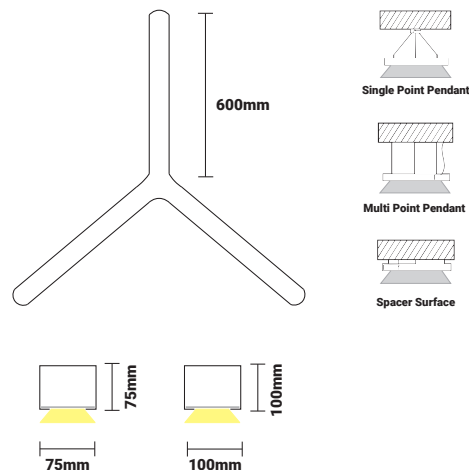

Code Builder

Model	Body Size	Mounting	Body	Diffuser	CRI	CCT	Power	Control
Yumi75	600 (6)	Single Point (SP)	White (W)	Opal (OP)	90 (9)	3000 (30)	15W/m (15)	Switched (S)
Yumi100		Multi Point (MP)	Black (B)	Microprism (MP)		4000 (40)	23W/m (23)	Push Dim (RS)
		Spacers (SP)	Grey (G)			Tuneable White (TW)	30W/m (30)	DALI (D)
			Anthracite (A)					Casambi (C)

Please note: Specification Values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/ down for illustrative purposes. We reserve the right to amend or change details without prior notification



Project Name _____

Luminaire Ref _____

Date _____

Yumi 1200mm - Surface / Suspended

Yumi brings a fresh feeling to every interior, with various mounting types. It gives you the opportunity to design freely, by placing multiple luminaires in playful compositions. Yumi is especially interesting because of its modularity. It can be strung together piece by piece to create impressive shapes. This modularity brings countless possible uses ranging from a single-light application to large scale light sculptures in projects.


Product Details

Mains Voltage (V)	230-240v	Binning (SDCM)	3	Ingress Protection	40	Body	Aluminium
Mains Frequency (Hz)	50-60 Hz	Operating Temp (C°)	-20° to 40°	LED Lifetime	50,000hrs L80 B10	Warranty	5 Years

Technical Specification

CCT	CRI	System Output	System Power	Efficacy (LLM/W)
3000	90	5645	54 (15W/m)	104.5
3000	90	8651	83 (23W/m)	104.2
3000	90	11290	108 (30W/m)	104.5
4000	90	6048	54 (15W/m)	112.0
4000	90	9269	83 (23W/m)	111.7
4000	90	12096	108 (30W/m)	112.0

Dimensional Drawing

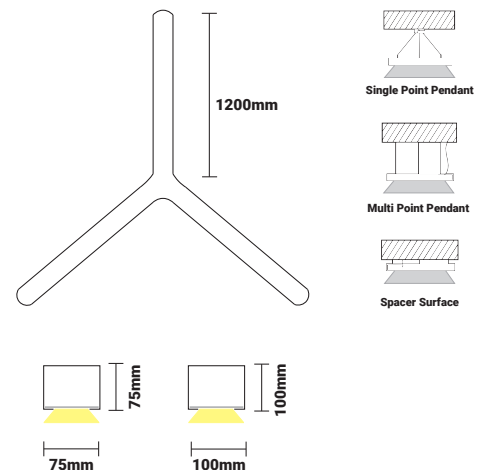

Code Builder

Model	Body Size	Mounting	Body	Diffuser	CRI	CCT	Power	Control
Yumi75	1200 (12)	Single Point (SP)	White (W)	Opal (OP)	90 (9)	3000 (30)	15W/m (15)	Switched (S)
Yumi100		Multi Point (MP)	Black (B)	Microprism (MP)		4000 (40)	23W/m (23)	Push Dim (RS)
		Spacers (SP)	Grey (G)			Tuneable White (TW)	30W/m (30)	DALI (D)
			Anthracite (A)					Casambi (C)

Please note: Specification Values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/ down for illustrative purposes. We reserve the right to amend or change details without prior notification