

Miu P S

55mm Pendant Tubular Light





Project Name _____

Luminaire Ref _____

Date _____


Miu P S - Pendant

The Miu creates an impressive accent for any room with its striking but minimal cylindrical design. The simple and timeless look of this luminaire goes hand in hand with its excellent lighting output, offering a quality and professional solution in terms of light colour, visual comfort and quality. In combination with the three different reflector colour choices (black, gold or white), the Miu offer a lot of variety for decorative accents. The Miu is available in two ceiling mounted and three pendant options in various diameters and lengths.

Product Details

Mains Voltage (V)	230-240v
Mains Frequency (Hz)	50-60 Hz
CRI (Ra)	90
Binning (SDCM)	3
Operating Temp (C°)	-20° to +40°
Ingress Protection	IP20
LED Lifetime	50,000hrs L80 B10
Optical Control	Optical Lens (PC)
Body	Die Cast Aluminium/ Injection moulded PC
Warranty	5 Years

Dimensions

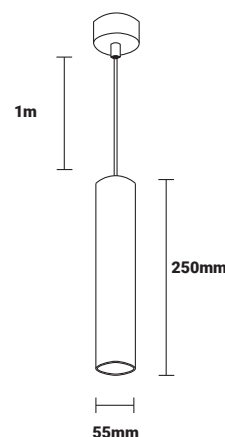

Technical Specification

CCT	CRI	System Output	System Power	Beam Angle
2700	90	900	11	18°
2700	90	900	11	36°
2700	90	900	11	50°
3000	90	1000	11	18°
3000	90	1000	11	36°
3000	90	1000	11	50°
4000	90	1100	11	18°
4000	90	1100	11	36°
4000	90	1100	11	50°

Please note: The above data is based on a black baffle, please contact sales for the data on other colour variants

Code Builder

Model	Body	Baffle	Accessories	CRI	CCT	Power	Beam Angle	Control	Emergency
MPS	White (W)	White (W)	Honeycomb (HC)	90 (9)	2700 (27)	11W (11)	18° (18)	Switched (S)	N/a
	Black (B)	Black (B)			3000 (30)		36° (36)	Phase Dim (PD)	
		Gold (G)			4000 (40)		50° (50)	DALI (D)	

Please note: Specification Values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/ down for illustrative purposes. We reserve the right to amend or change details without prior notification