

Passion 200

Professional 200mm Downlight





Project Name _____

Luminaire Ref _____

Date _____


Passion 200 - Recessed

Passion offers an excellent balance of visual comfort and efficiency, featuring a deeply integrated light source for glare control with a 30° shielding angle. The 60° beam angle with an opal cover ensures smooth light distribution, which is available in single CCT versions achieving up to 140lm/W. The switchable CCT option (3000k-3500k-4000k) also simplifies inventory management. The Passion has an IP54 rating with a variety of colour finishes to make the fixture adaptable to a wide range of environments to fulfill any project.

Product Details

Mains Voltage (V)	230-240v
Mains Frequency (Hz)	50-60 Hz
CRI (Ra)	80 & 90
Binning (SDCM)	3
Operating Temp (C°)	-20° to +40°
Ingress Protection	IP54 (Front)
LED Lifetime	50,000hrs L80 B10
Optical Control	Optical Lens with Opal Cover
Body	Die Cast Aluminium/ Injection moulded PC
Warranty	5 Years

Dimensions

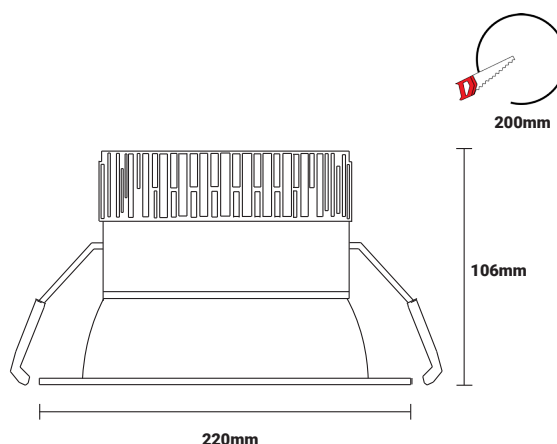

Technical Specification

CCT	CRI	System Output	System Power	Beam Angle
3000	80	3500	25	60
4000	80	3650	25	60
30-35-40	80	3550	25	60

CCT	CRI	System Output	System Power	Beam Angle
3000	80	4350	33	60
4000	80	4600	33	60
30-35-40	80	4350	33	60

Please note: The above data is based on a matt reflector, please contact sales for the data on other colour variants and Ra90

Code Builder

Model	Bezel	Reflector	CRI	CCT	Power	Beam Angle	Control	Emergency
P200	White (W)	White (W)	80 (8)	3000 (30)	25W (25)	60° (60)	Switched (S)	Std Emergency (EM)
	Black (B)	Black (B)	90 (9)	4000 (40)	33W (33)		DALI (D)	Self Test (EMST)
		Matt (M)		Switchable (SW)			Casambi (C)	DALI (EMD)
		White Specular (WS)						

Please note: Specification Values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/ down for illustrative purposes. We reserve the right to amend or change details without prior notification