

Takeo 150 Pro

Professional 150mm Downlight





Project Name _____

Luminaire Ref _____

Date _____

Takeo 150 Pro - Recessed


The Takeo downlight series is designed to blend seamlessly with various architectural settings, manufactured from die-cast aluminum with interchangeable reflectors and optics allowing for full flexibility on any project even post installation.

The Takeo series is designed around efficiency achieving over 120lm/W along with IP54 rating as standard for moisture resistance the Takeo series is both powerful and practical with optical control for ultimate glare control.

Product Details

Mains Voltage (V)	230-240v
Mains Frequency (Hz)	50-60 Hz
CRI (Ra)	80 & 90
Binning (SDCM)	2
Operating Temp (C°)	-20° to +40°
Ingress Protection	IP54
LED Lifetime	50,000hrs L80 B10
Optical Control	Optical Lens (PC)
Body	Die Cast Aluminium/ Injection moulded PC
Warranty	5 Years

Dimensions

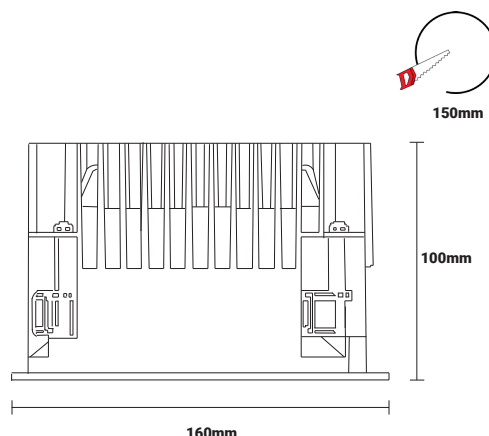

Technical Specification

CCT	CRI	System Output	System Power	Beam Angle
2700	80	2450	19	30
2700	80	2100	19	65
3000	80	2600	19	30
3000	80	2200	19	65
4000	80	2800	19	30
4000	80	2400	19	65

CCT	CRI	System Output	System Power	Beam Angle
2700	80	3100	26	30
2700	80	2700	26	65
3000	80	3300	26	30
3000	80	2850	26	65
4000	80	3600	26	30
4000	80	3100	26	65

Please note: The above data is based on a matt reflector, please contact sales for the data on other colour variants and Ra90

Code Builder

Model	Bezel	Reflector	CRI	CCT	Power	Beam Angle	Control	Emergency
T150Pro	White (W)	White (W)	80 (8)	2700 (27)	19W (19)	30° (30)	Switched (S)	Std Emergency (EM)
	Black (B)	Black (B)	90 (9)	3000 (30)	26W (26)	65° (65)	Phase Dim (PD)	Self Test (EMST)
		Matt (M)		4000 (40)			DALI (D) Casambi (C)	DALI (EMD)

Please note: Specification Values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/ down for illustrative purposes. We reserve the right to amend or change details without prior notification