


ML26 RS40

48v 40mm Spot Insert



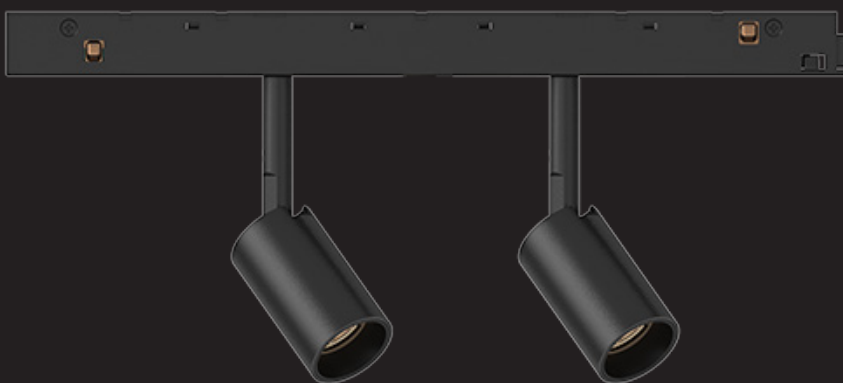

Project Name _____

Luminaire Ref _____

Date _____


ML26 RS40 - 48v 40mm Spot Insert

With three different spotlight sizes ranging from Ø25mm, Ø40mm to Ø55mm, the spotlight modules of the ML26 system offer plenty of scope for designing exciting lighting solutions. The minimalist designed spots of the ML26 system ensure excellent accent lighting alongside a wide beam angle allowing different shapes and sizes of changing objects to be put into the right light with the best light quality. The low-set LED inside the spot provides a high level of visual comfort with a UGR value of <19.

Product Details

Mains Voltage (V)	230-240v
Mains Frequency (Hz)	50-60 Hz
CRI (Ra)	90
Binning (SDCM)	3
Operating Temp (C°)	-20° to +40°
Ingress Protection	IP20
LED Lifetime	50,000hrs L80 B10
Optical Control	Optical Lens PC
Body	Die Cast Aluminium/ Injection moulded PC
Warranty	5 Years

Dimensions

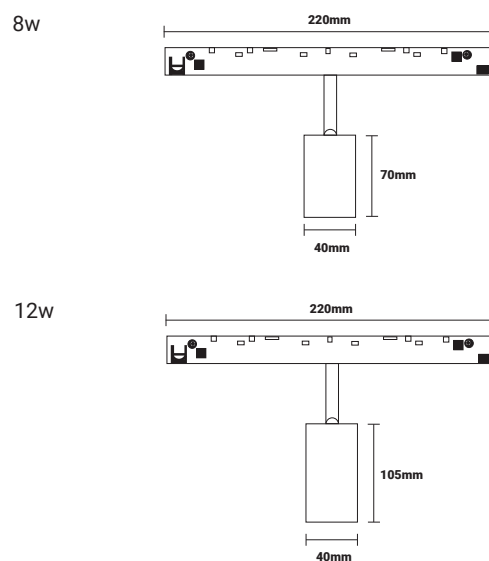

Technical Specification

CCT	CRI	System Output	System Power	Beam Angle
2700	90	550	8	18°
2700	90	550	8	30°
2700	90	400	8	45°
3000	90	580	8	18°
3000	90	580	8	30°
3000	90	420	8	45°
4000	90	640	8	18°
4000	90	640	8	30°
4000	90	460	8	45°

CCT	CRI	System Output	System Power	Beam Angle
2700	90	700	12	18°
2700	90	700	12	30°
2700	90	550	12	45°
3000	90	750	12	18°
3000	90	750	12	30°
3000	90	600	12	45°
4000	90	800	12	18°
4000	90	800	12	30°
4000	90	650	12	45°

Code Builder

Model	Body	Reflector	CRI	CCT	Power	Beam Angle	Control	Emergency
RS40S	White (W)	Black (B)	90 (9)	2700 (27)	8W (8)	18° (18)	Switched (S)	N/A
	Black (B)			3000 (30)	12W (12)	30° (30)	DALI (D)	
	Brushed Bronze (BB)			4000 (40)		45° (45)		
	Brushed Gold (BG)							

Please note: Specification Values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/ down for illustrative purposes. We reserve the right to amend or change details without prior notification



Project Name _____

Luminaire Ref _____

Date _____

ML26 RS40 - 48v 40mm Twin Spot Insert


With three different spotlight sizes ranging from Ø25mm, Ø40mm to Ø55mm, the spotlight modules of the ML26 system offer plenty of scope for designing exciting lighting solutions. The minimalist designed spots of the ML26 system ensure excellent accent lighting alongside a wide beam angle allowing different shapes and sizes of changing objects to be put into the right light with the best light quality. The low-set LED inside the spot provides a high level of visual comfort with a UGR value of <19.

Product Details


Mains Voltage (V)	230-240v
Mains Frequency (Hz)	50-60 Hz
CRI (Ra)	90
Binning (SDCM)	3
Operating Temp (C°)	-20° to +40°
Ingress Protection	IP20
LED Lifetime	50,000hrs L80 B10
Optical Control	Optical Lens PC
Body	Die Cast Aluminium/ Injection moulded PC
Warranty	5 Years

Dimensions

16w



24w



Technical Specification

CCT	CRI	System Output	System Power	Beam Angle
2700	90	1000	16	18°
2700	90	1000	16	30°
2700	90	800	16	45°
3000	90	1100	16	18°
3000	90	1100	16	30°
3000	90	850	16	45°
4000	90	1200	16	18°
4000	90	1200	16	30°
4000	90	900	16	45°

CCT	CRI	System Output	System Power	Beam Angle
2700	90	1400	24	18°
2700	90	1400	24	30°
2700	90	1100	24	45°
3000	90	1500	24	18°
3000	90	1500	24	30°
3000	90	1200	24	45°
4000	90	1600	24	18°
4000	90	1600	24	30°
4000	90	1300	24	45°

Code Builder

Model	Body	Reflector	CRI	CCT	Power	Beam Angle	Control	Emergency
RS40T	White (W)	Black (B)	90 (9)	2700 (27)	16W (16)	18° (18)	Switched (S)	N/A
	Black (B)			3000 (30)	24W (24)	30° (30)	DALI (D)	
	Brushed Bronze (BB)			4000 (40)	45° (45)			
	Brushed Gold (BG)							

Please note: Specification Values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/ down for illustrative purposes. We reserve the right to amend or change details without prior notification