

ML26 RS72

48v 72mm Spot Insert





Project Name _____

Luminaire Ref _____

Date _____


ML26 RS72 - 48v 72mm Spot Insert

With three different spotlight sizes ranging from Ø25mm, Ø40mm to Ø55mm, the spotlight modules of the ML26 system offer plenty of scope for designing exciting lighting solutions. The minimalist designed spots of the ML26 system ensure excellent accent lighting alongside a wide beam angle allowing different shapes and sizes of changing objects to be put into the right light with the best light quality. The low-set LED inside the spot provides a high level of visual comfort with a UGR value of <19.

Product Details

Mains Voltage (V)	230-240v
Mains Frequency (Hz)	50-60 Hz
CRI (Ra)	90
Binning (SDCM)	3
Operating Temp (C°)	-20° to +40°
Ingress Protection	IP20
LED Lifetime	50,000hrs L80 B10
Optical Control	Optical Lens PC
Body	Die Cast Aluminium/ Injection moulded PC
Warranty	5 Years

Dimensions

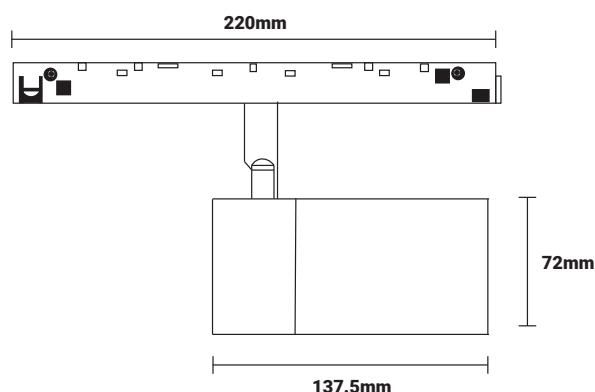

Technical Specification

CCT	CRI	System Output	System Power	Beam Angle
2700	90	1500	19	20°
2700	90	1600	19	35°
2700	90	1600	19	55°
3000	90	1600	19	20°
3000	90	1700	19	35°
3000	90	1700	19	55°
4000	90	1700	19	20°
4000	90	1800	19	35°
4000	90	1800	19	55°

CCT	CRI	System Output	System Power	Beam Angle
2700	90	2100	26	20°
2700	90	2300	26	35°
2700	90	2300	26	55°
3000	90	2200	26	20°
3000	90	2400	26	35°
3000	90	2400	26	55°
4000	90	2400	26	20°
4000	90	2600	26	35°
4000	90	2600	26	55°

Code Builder

Model	Body	Reflector	CRI	CCT	Power	Beam Angle	Control	Emergency		
RS72S	White (W)	Black (B)	90 (9)	2700 (27)	19W (19)	20° (20)	Switched (S)	N/A		
	Black (B)			3000 (30)	26W (26)	35° (35)	DALI (D)			
				4000 (40)		55° (55)				

Please note: Specification Values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/ down for illustrative purposes. We reserve the right to amend or change details without prior notification