

EDCB

Die Cast IP65 Bulkhead





Project Name _____

Luminaire Ref _____

Date _____


EDCB - Wall/Ceiling Mounted

The trimless classic design of the EDCB bulkhead make them suitable for virtually any general outdoor area lighting application. Available as a full diffuser or stylish eyelid versio, both can be specified with integral emergency and photocell as options.

Product Details

Mains Voltage (V)	220-240V	Mains Frequency (Hz)	50-60 Hz	Power Factor	>0.9	Body	Aluminium
Warranty	5 Years	CRI (Ra)	>80	Binning (SDCM)	3	Optics	Polycarbonate
LED Lifetime	50,000hrs L70 B50	Operating Temp (C°)	-20° to 45°	Ingress Protection	IP65	IK Rating	IK10

Dimensional Drawing

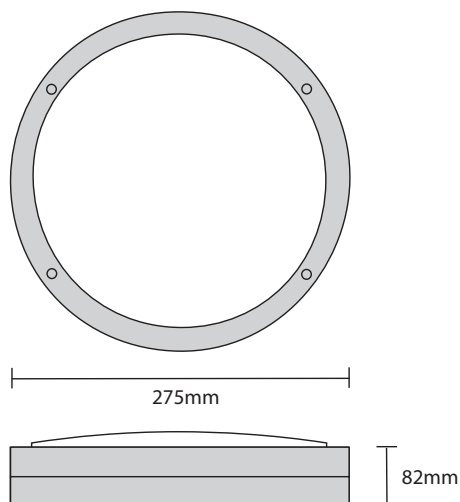

Technical Specification

CCT (K)	System Output (LLM)	System Power (W)	Efficacy (LLM/W)
4000	1498	18.9	79.25

Code Builder

Model	CCT	Power	Control	Emergency	Sensors	Accessories
EDCB	4000 (40)	18 (18)	Switched (S)	Standard 3hr (EM)	Photocell (PC)	Eyelid (EY)

Please note: Specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/down for illustrative purposes. We reserve the right to amend or change details without prior notification.