

EGuard

Wattage and CCT Selectable Bollard



Chiara Lighting Ltd,
Unit 14E Club Lane,
Calderdale Business Park,
Calderdale
HX2 8DB

Tel: +44 (0)330 0571 888

Email: Hello@chiaralighting.com

Web: www.chiaralighting.com





Project Name _____

Luminaire Ref _____

Date _____

EGuard - Bollard


EGuard architectural bollards are stylish and robust. Available in 4 interchangeable heads. Ideal for walkways, entrance ways, drives and other small area lighting applications where low mounting heights are desirable.

Product Details


Mains Voltage (V)	120-277v	Mains Frequency (Hz)	50-60 Hz	Power Factor	>0.9	Body	Aluminium
Warranty	5 Years	CRI (Ra)	>70	Binning (SDCM)	3	Optical Control	Cone/ Louvre
LED Lifetime	54,000hrs L70 B50	Operating Temp (C°)	-20° to 50°	Ingress Protection	IP65	IK Rating	IK08

Dimensional Drawing

Flat Top

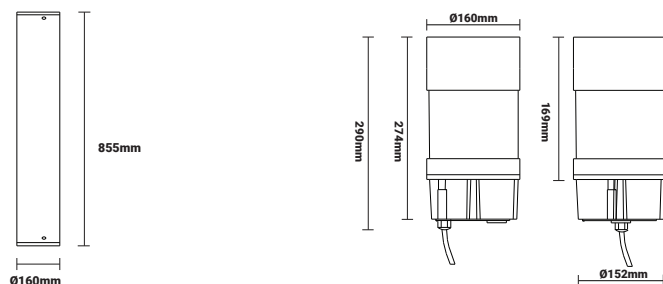

Cone Top

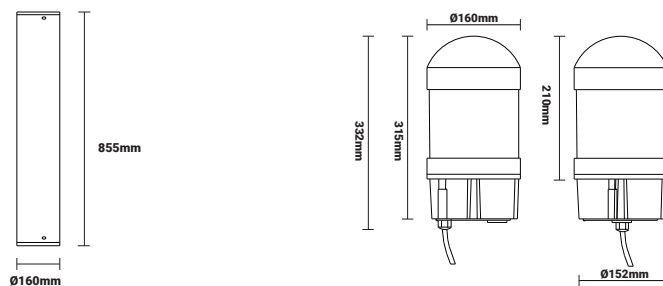

Technical Specification

Cone

CCT (K)	System Output (LLM)	System Power (W)	Efficacy (LLM/W)
3000	1989	14	142.07
4000	1989	14	142.07
3000	2666	19	140.31
4000	2760	19	145.26
3000	3326	24	138.58
4000	3468	24	144.50

Louvre

CCT (K)	System Output (LLM)	System Power (W)	Efficacy (LLM/W)
3000	1133	14	80.92
4000	1148	14	82.00
3000	1524	19	80.21
4000	1565	19	82.36
3000	1905	24	79.37
4000	1929	24	80.37

Code Builder

Model	Head Shape	Optic	CCT	Power	Control	Emergency	Accessories
EGUA	Flat (F) Dome (D)	Cone (C) Louvre (L)	3000/4000 (CCT)	14/19/24 (W)	Switched (S)	Standard 3hr (EM)	Soft Ground Kit (SG)

Please note: Specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/down for illustrative purposes. We reserve the right to amend or change details without prior notification.