

EHydrus S

Architectural Wallpack Small





Project Name _____

Luminaire Ref _____

Date _____


EHydrus S - Wall Mounted

The EHydrus Small takes the same attractive aesthetics as its larger cousin with a smaller form, still packing the same high performance and practicality. Selectable 3000k or 4000k makes this the ideal choice for any public sector or exterior lighting.

Product Details

Mains Voltage (V)	230-240V	Mains Frequency (Hz)	50-60 Hz	Power Factor	>0.9	Body	Aluminium
Warranty	5 Years	CRI (Ra)	>80	Binning (SDCM)	3	Optical Control	Diffuser
LED Lifetime	54,000hrs L80 B50	Operating Temp (C°)	-20° to 40°	Ingress Protection	IP65	IK Rating	IK10

Dimensional Drawing

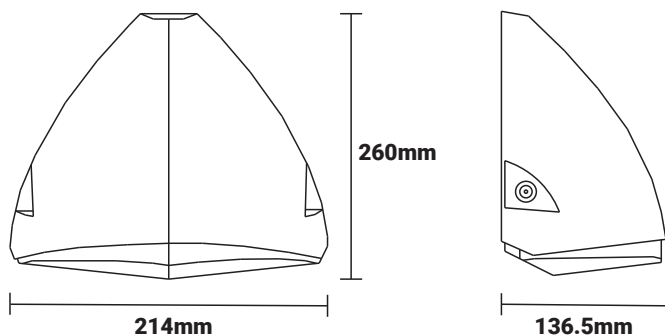

Technical Specification

CCT (K)	System Output (LLM)	System Power (W)	Efficacy (LLM/W)
4000	950	10	95.00
4000	1200	12	100.00
4000	1400	13	107.69
4000	1600	15	106.66

Code Builder

Model	CCT	Power	Control	Emergency
EHYS	3000/4000 (CCT)	10/12/13/15 (W)	Switched (S)	Standard 3hr (EM)

Please note: Specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/down for illustrative purposes. We reserve the right to amend or change details without prior notification.