

EWallpack

Slimline Wallpack



TradePro





Project Name _____

Luminaire Ref _____

Date _____


EWallpack - Wall Mounted

Robust and resilient, the EWallpack is suitable for any exterior Lighting Application. The Slimline Design can also be supplied with integral emergency and photocell options.

Product Details

Mains Voltage (V)	230V	Mains Frequency (Hz)	50-60 Hz	Power Factor	>0.9	Body	Aluminium
Warranty	5 Years	CRI (Ra)	>80	Binning (SDCM)	3	Optical Control	Diffuser
LED Lifetime	50,000hrs L70 B50	Operating Temp (C°)	-20° to 45°	Ingress Protection	IP65	IK Rating	IK10

Dimensional Drawing

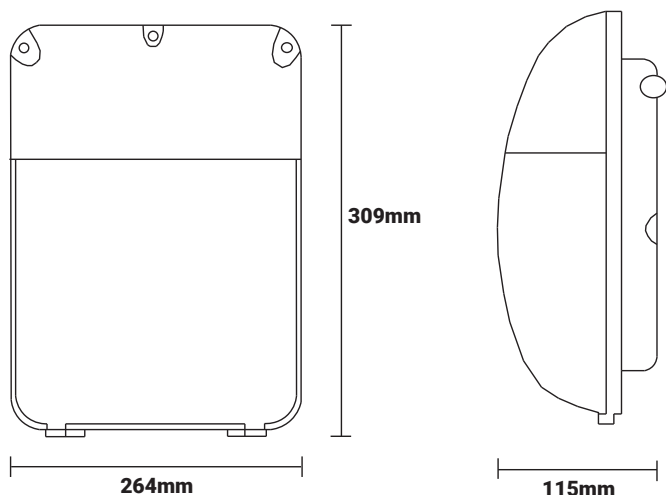

Technical Specification

CCT (K)	System Output (LLM)	System Power (W)	Efficacy (LLM/W)
6400	2600	30	86.66

Code Builder

Model	CCT	Power	Control	Emergency	Sensors
EWAL	6400 (64)	30 (30)	Switched (S) DALI (D)	Self-Test (EMST) DALI (EMD)	Photocell (PC)

Please note: Specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/down for illustrative purposes. We reserve the right to amend or change details without prior notification.