

OmApollo

4 CCT, Wattage Selectable, IP65 Plug & Play Bulkhead





Project Name _____

Luminaire Ref _____

Date _____

OmApollo - Wall/Ceiling Mounted


The OmApollo bulkhead offers both economy and efficacy all in one! With high efficiency of 135lm/W, selectable power 9/12/16 and 4 CCT options. Can be paired with plug and play emergency kit and microwave sensor with corridor function.

Suitable for indoor or outdoor applications with premium design features such as matt textured bezel, opal diffuser, IP65 rating and side conduit entry, with optional black eyelid bezel.

Product Details

Mains Voltage (V)	220-240V	Mains Frequency (Hz)	50-60 Hz	Power Factor	>0.9	Body	Polycarbonate
Warranty	5 Years	CRI (Ra)	>80	Binning (SDCM)	3	Optics	Polycarbonate
LED Lifetime	113,000hrs L80 B10	Operating Temp (C°)	-20° to 45°	Ingress Protection	IP65	IK Rating	IK08

Dimensional Drawing

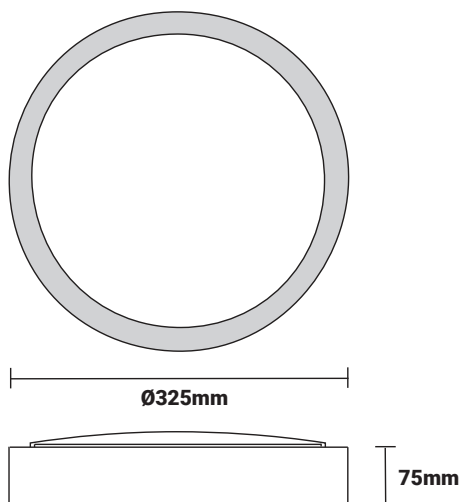

Technical Specification

CCT (K)	System Output (LLM)	System Power (W)	Efficacy (LLM/W)
3000	1122	9	124.66
4000	1225	9	136.11
5000	1196	9	132.88
6000	1154	9	128.22
3000	1491	12	124.25
4000	1632	12	136.00
5000	1603	12	133.58
6000	1560	12	130.00
3000	1989	16	124.31
4000	2197	16	137.31
5000	2140	16	133.75
6000	2100	16	131.25

Code Builder

Model	Body	CCT	Power	Control	Emergency	Sensors	Accessories
OMAP	Black (B) White (W) Chrome (C)	3000/ 4000, 5000, 6000 (CCT)	9/12/16 (W)	Switched (S)	Self-Test (EMST)	Microwave (MW)	Black Eyelid (BEY)

Please note: Specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/down for illustrative purposes. We reserve the right to amend or change details without prior notification.