

OmHalo L

Slim Large Steel, CCT & Wattage Selectable Bulkhead





Project Name _____

Luminaire Ref _____

Date _____


OmHalo L - Wall/Ceiling Mounted

The OmHalo Large is our latest new and improved slim profile bulkhead. Featuring increased lumen output and improved efficacy, it is ideal for stairwells and circulation areas.

Product Details

Mains Voltage (V)	230V	Mains Frequency (Hz)	50-60 Hz	Power Factor	>0.9	Body	Polycarbonate
Warranty	5 Years	CRI (Ra)	>80	Binning (SDCM)	3	Optics	Polycarbonate
LED Lifetime	30,000hrs L80 B50	Operating Temp (C°)	-0° to 40°	Ingress Protection	IP20	IK Rating	IK04

Dimensional Drawing

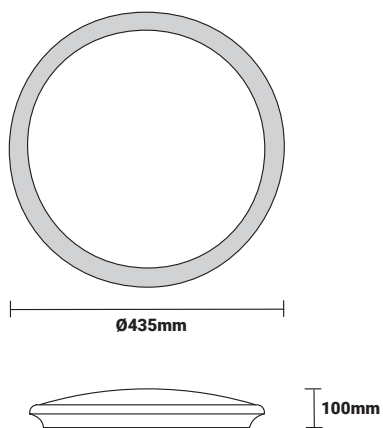

Technical Specification

4000K

CCT (K)	System Output (LLM)	System Power (W)	Efficacy (LLM/W)
4000	2000	16	125.00
4000	2520	21	120.00
4000	3000	25	120.00
4000	3600	30	120.00

Please note: All data shown above is based on 4000K, please contact our Sales team for other colour temperatures.

Code Builder

Model	Body	CCT	Power	Control	Emergency	Sensors
OMHAL	Black (B) White (W) Chrome (C)	3000/4000/6000 (CCT)	16/21/25/30 (W)	Switched (S) DALI (D)	Self-Test (EMST) DALI (EMD)	Microwave (MW)

Please note: Specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/down for illustrative purposes. We reserve the right to amend or change details without prior notification.