

OmHalo S

Slim Small Steel, CCT & Wattage Selectable Bulkhead





Project Name _____

Luminaire Ref _____

Date _____


OmHalo S - Wall/Ceiling Mounted

The OmHalo Small is the new mini version of our popular OmHalo large bulkhead. Featuring improved slim body with discreet side conduit entry points, improved efficacy of 120lm/W and now compatible with plug & play emergency & microwave kits. Designed for use in stairwells and circulation areas.

Product Details

Mains Voltage (V)	220-240V	Mains Frequency (Hz)	50-60 Hz	Power Factor	>0.9	Body	Steel Base
Warranty	5 Years	CRI (Ra)	>80	Binning (SDCM)	3	Optics	Polycarbonate
LED Lifetime	50,000hrs L70 B50	Operating Temp (C°)	-20° to 40°	Ingress Protection	IP20	IK Rating	IK06

Dimensional Drawing

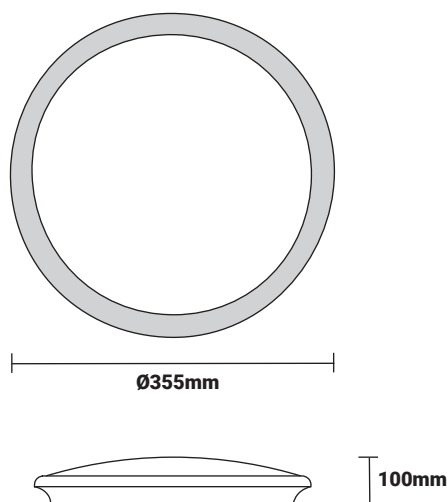

Technical Specification

4000K

CCT (K)	System Output (LLM)	System Power (W)	Efficacy (LLM/W)
4000	1000	8	125.00
4000	1440	12	120.00
4000	1920	16	120.00
4000	2300	19	121.05

Please note: All data shown above is based on 4000K, please contact our Sales team for other colour temperatures.

Code Builder

Model	Body	CCT	Power	Control	Emergency	Sensors
OMHAS	White (W)	3000/4000/6000 (CCT)	8/12/16/19 (W)	Switched (S) DALI (D)	Self-Test (EMST) DALI (EMD)	Microwave (MW)

Please note: Specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/down for illustrative purposes. We reserve the right to amend or change details without prior notification.