

OmOxford

UGR <19 Linear Twin Batten



TradePro



Chiara Lighting Ltd,
Unit 14E Club Lane,
Calderdale Business Park,
Calderdale
HX2 8DB

Tel: +44 (0)330 0571 888

Email: Hello@chiaralighting.com

Web: www.chiaralighting.com



LED ARCHITECTURAL

CHIARA

UK LIGHTING CO.

Project Name

Luminaire Ref

Date


OmOxford - 1200mm - Surface/ Pendant Mounted

The OmOxford is a modern and minimalistic linear twin batten designed for indoor applications requiring low glare. Designed specifically for classrooms and office environments with visual comfort in mind. With selectable CCT and power, high efficacy of 120lm/W, 7 year warranty and plug and play capability.

Product Details

Mains Voltage (V)	180-264V	Mains Frequency (Hz)	50-60 Hz	Power Factor	>0.95	Body	Steel
Warranty	7 Years	CRI (Ra)	>80	Binning (SDCM)	3	Optics	Polycarbonate
LED Lifetime	170,000hrs L70 B50	Operating Temp (C°)	-20° to 60°	Ingress Protection	IP20	IK Rating	IK08

Dimensional Drawing

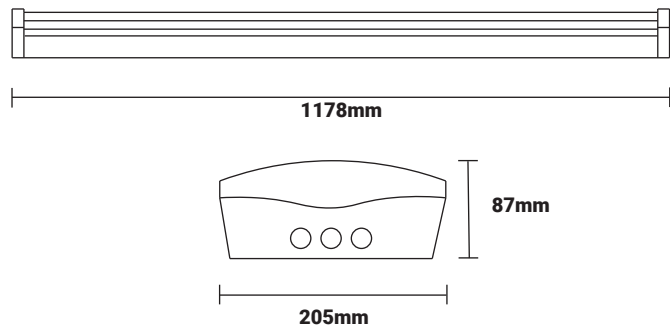

Technical Specification

4000K

CCT (K)	System Output (LLM)	System Power (W)	Efficacy (LLM/W)
4000	2040	17	120.00
4000	2640	22	120.00
4000	3120	26	120.00
4000	3600	30	120.00

Please note: All data shown above is based on 4000K, please contact our Sales team for other colour temperatures.

Code Builder

Model	Length	CCT	Power	Control	Emergency	Sensors	Accessories
OMOX	1200 (4)	3000/4000, 6000 (CCT)	17/22/26/30 (W)	Switched (S)	Self-Test (EMST)	Microwave (MW)	1.8mtr Suspension Kit (SUS)
OMOX	1200 (4)	3000/4000/6000 (CCT)	30 (30)	DALI (D)	Self-Test (EMST)	Microwave (MW)	1.8mtr Suspension Kit (SUS)

Please note: Specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/down for illustrative purposes. We reserve the right to amend or change details without prior notification.



LED ARCHITECTURAL

CHIARA

UK LIGHTING CO.

Project Name

Luminaire Ref

Date


OmOxford - 1500mm - Surface/ Pendant Mounted

The OmOxford is a modern and minimalistic linear twin batten designed for indoor applications requiring low glare. Designed specifically for classrooms and office environments with visual comfort in mind. With selectable CCT and power, high efficacy of 120lm/W, 7 year warranty and plug and play capability.

Product Details

Mains Voltage (V)	180-264V	Mains Frequency (Hz)	50-60 Hz	Power Factor	>0.95	Body	Steel
Warranty	7 Years	CRI (Ra)	>80	Binning (SDCM)	3	Optics	Polycarbonate
LED Lifetime	170,000hrs L70 B50	Operating Temp (C°)	-20° to 60°	Ingress Protection	IP20	IK Rating	IK08

Dimensional Drawing

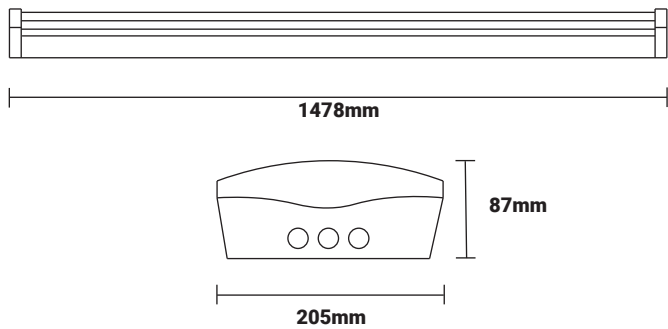

Technical Specification

4000K

CCT (K)	System Output (LLM)	System Power (W)	Efficacy (LLM/W)
4000	3240	27	120.00
4000	4080	34	120.00
4000	4800	40	120.00
4000	5760	47	120.00

Please note: All data shown above is based on 4000K, please contact our Sales team for other colour temperatures.

Code Builder

Model	Length	CCT	Power	Control	Emergency	Sensors	Accessories
OMOX	1500 (5)	3000/4000, 6000 (CCT)	27/34/40/47 (W)	Switched (S)	Self-Test (EMST)	Microwave (MW)	1.8mtr Suspension Kit (SUS)
OMOX	1500 (5)	3000/4000/6000 (CCT)	47 (47)	DALI (D)	Self-Test (EMST)	Microwave (MW)	1.8mtr Suspension Kit (SUS)

Please note: Specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/down for illustrative purposes. We reserve the right to amend or change details without prior notification.

