

OmPanel

595x595mm TpA Backlit Panel





Project Name _____

Luminaire Ref _____

Date _____


OmPanel - Lay-in Grid

OmPanel back-lit panels offer a cost effective option for UGR<19 panels featuring a TP(a) diffuser & 110lm/W efficacy. The high performance microprism diffuser is ideal to assist with projects that are required to achieve UGR<19 compliance.

Product Details

Mains Voltage (V)	230V	Mains Frequency (Hz)	50-60 Hz	Power Factor	>0.9	Body	Aluminium
Warranty	5 Years	CRI (Ra)	>80	Binning (SDCM)	3	Optics	Tp(a) Polystyrene
LED Lifetime	50,000hrs L80 B50	Operating Temp (C°)	-10° to 40°	Ingress Protection	IP40	IK Rating	IK02

Dimensional Drawing

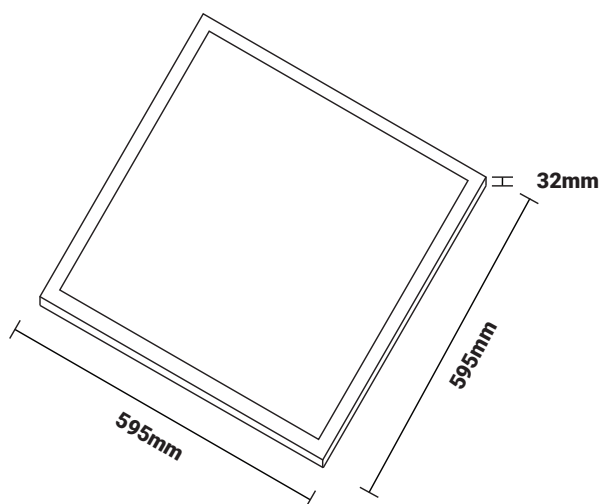

Technical Specification

4000K

CCT (K)	System Output (LLM)	System Power (W)	Efficacy (LLM/W)
4000	3025	28	108.03
4000	3425	32	107.03
4000	3802	36	105.61

Please note: All data shown above is based on 4000K, please contact our Sales team for other colour temperatures.

Code Builder

Model	CCT	Power	Control	Emergency	Accessories
OMPA	3000 (30)	28/32/36 (W)	Switched (S)	Self-Test (EMST)	1.8mtr Suspension Kit (SUS)
	4000 (40)		DALI (D)	DALI (EMD)	Surface Kit (SK)
	6000 (60)				

Please note: Specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/down for illustrative purposes. We reserve the right to amend or change details without prior notification.