

XEMB

Maintained Bulkhead



Emergency





Project Name _____

Luminaire Ref _____

Date _____


XEMB - Surface Mounted

The XEMB emergency bulkheads can be configured for either maintained or non-maintained operation. The product features a convenient hinged gear tray for easy installation and a prismatic lens that offers improved spacings for both escape route and open area lighting. LiFePO4 batteries ensure a longer and more reliable service life.

Product Details

Mains Voltage (V)	220-240V	Mains Frequency (Hz)	50-60 Hz	Nett Weight (kg)	0.51	Body	ABS
Warranty	5 Years	CRI (Ra)	>80	Insulation Class	II	Optics	N/a
LED Lifetime	54,000hrs	Operating Temp (C°)	0° to 45°	Ingress Protection	IP66	IK Rating	IK08

Dimensional Drawing

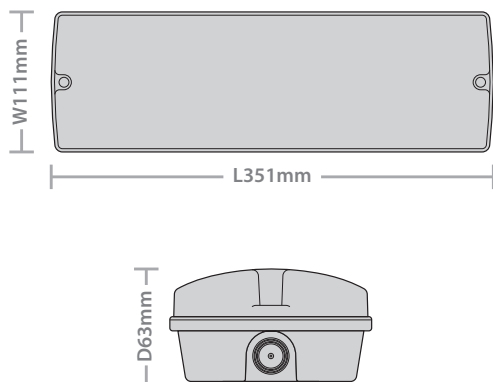

Technical Specification - Standard

Wattage	3W
Lumen Output	150lm
Emergency Lumen Output	150lm
Colour Temperature	6500K
Battery Type	LiFePO4
Warranty (Electrical)	5 Years
Warranty (Battery)	5 Years
Colour Finish	White RAL 9003
Control	Selectable Self-Test/ Manual

Technical Specification - High Output

Wattage	4.8W
Lumen Output	300lm
Emergency Lumen Output	300lm
Colour Temperature	6500K
Battery Type	LiFePO4
Warranty (Electrical)	5 Years
Warranty (Battery)	5 Years
Colour Finish	White RAL 9003
Control	Selectable Self-Test/ Manual

Code Builder

Model	Colour	Control
XEMB	White (W)	Selectable Self-Test/Manual (ST)
XEMB300 (High Output)	White (W)	Selectable Self-Test/Manual (ST)

Please note: Specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/down for illustrative purposes. We reserve the right to amend or change details without prior notification.